
发行版本 Revision	修 改 内 容 Description	制 图 Drawing	日 期 Date
R1.0	First release	Riky	2025.09.10

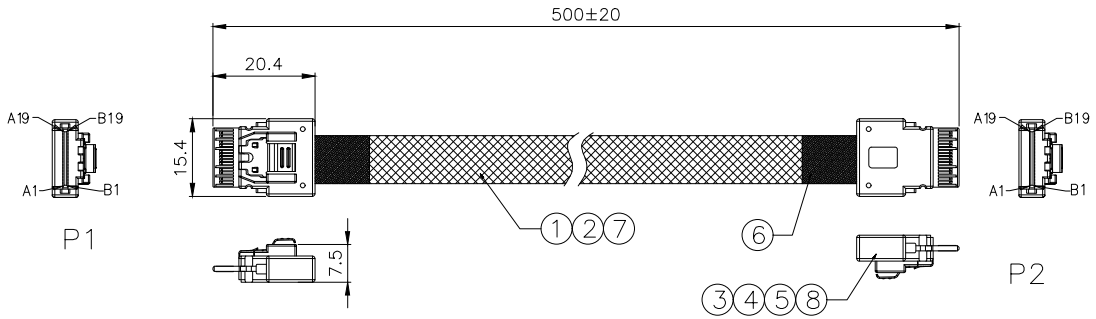

P1		P2	
GND	B19	GND	A19
RX3−	B18	TX3−	A18
RX3+	B17	TX3+	A17
GND	B16	GND	A16
RX2−	B15	TX2−	A15
RX2+	B14	TX2+	A14
GND	B13	GND	A13
SB5	B12	SB5	A12
SB4	B11	SB4	A11
SB9	B10	SB9	A10
SB3	B9	SB3	A9
SB7	B8	SB7	A8
GND	B7	GND	A7
RX1−	B6	TX1−	A6
RX1+	B5	TX1+	A5
GND	B4	GND	A4
RX0−	B3	TX0−	A3
RX0+	B2	TX0+	A2
GND	B1	GND	A1
GND	A19	GND	B19
TX3−	A18	RX3−	B18
TX3+	A17	RX3+	B17
GND	A16	GND	B16
TX2−	A15	RX2−	B15
TX2+	A14	RX2+	B14
GND	A13	GND	B13
SB6	A12	SB6	B12
SB2	A11	SB2	B11
SB8	A10	SB8	B10
SB1	A9	SB1	B9
SB0	A8	SB0	B8
GND	A7	GND	B7
TX1−	A6	RX1−	B6
TX1+	A5	RX1+	B5
GND	A4	GND	B4
TX0−	A3	RX0−	B3
TX0+	A2	RX0+	B2
GND	A1	GND	B1

ELECTRICAL CHARACTER:

a. 100% OPEN&SHORT TESTING;

b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;

c. INSULATION RESISTANCE:10M Ohm(Min);

d. CONDUCTIVE RESISTANCE:2 Ohm(Max).

NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT
8	LATCH	STAINLESS STEEL	2	pcs
7	EXPANDO	PET BALCK □D：10mm	A/R	mm
6	ACETATE TAPE	W=25±5mm,BLACK	25	mm
5	MOLDING	LDPE,NATURAL	A/R	g
4	MOLDING	PBT+30GF% BLACK	A/R	g
3	PCBA	SLIMSAS 4I PCB, PIN:15u&30u Au, 88±8 ohm	2	PCS
2	CABLE	30AWG CABLE,□D:0.65	A/R	mm
1	CABEL	(32AWG*2C+2D)AL+MYLAR,□D:0.65*1.54MM,85±5 ohm。	A/R	mm

RENHOTEC GROUP

客户料号 Cus'P/N		料 号 P/N	RHT-726-1002	品 名 Name	Slim SAS SFF-8654 4i to SFF-8654 4i		
未注公差 Unless Otherwise Specified		单 位 Unit	mm	版 本 Revision	R1.0	图纸确认 APPROVAL	日期 Date
线性 Linear	0.5~6 ±0.2	比 例 Scale	--			绘 图 Drawing	Riky	2025.09.10
	>6~30 ±0.3					审 核 Checked	Jason	2025.09.10
	>30 ±2%	页 码 Page				客户确认 Customer Approved		
角度Angles	±3°			Third Angle Projection				