




发行版本 Revision
R1.0

修改内容 Description
First release

制图 Drawing
Riky

日期 Date
2025.09.10

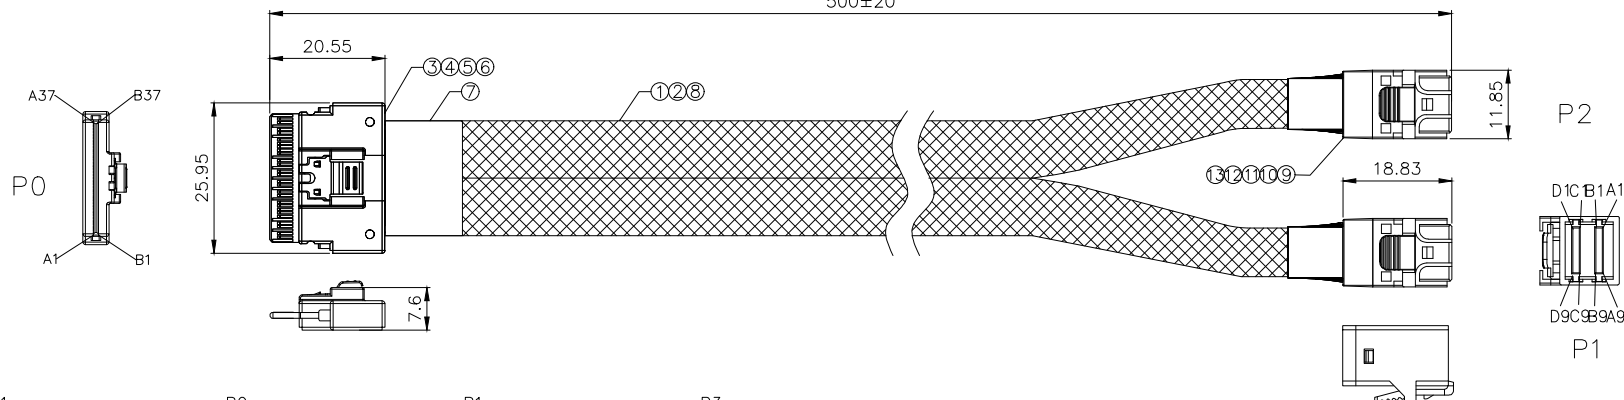

P1	P2
B19 GND	A9 GND
B18 TX3-	A8 RX3-
B17 TX3+	A7 RX3+
B16 GND	A6/B9 GND
B15 TX2-	B8 RX2-
B14 TX2+	B7 RX2+
B13 GND	B6 GND
B12 SB 6A	D1 SB 6A
B11 SB 2A	C1 SB 2A
B10 SB 8A	
B9 SB 1A	B1 SB 1A
B8 SB 0A	A1 SB 0A
B7 GND	A6 GND
B6 TX1-	A5 RX1-
B5 TX1+	A4 RX1+
B4 GND	A3/B6 GND
B3 TX0-	B5 RX0-
B2 TX0+	B4 RX0+
B1 GND	B3 GND
A19 GND	C9 GND
A18 RX3-	C8 TX3-
A17 RX3+	C7 TX3+
A16 GND	C6/D9 GND
A15 RX2-	D8 TX2-
A14 RX2+	D7 TX2+
A13 GND	D6 GND
A12 SB 5A	D2 SB 5A
A11 SB 4A	C2 SB 4A
A10 SB 9A	
A9 SB 3A	B2 SB 3A
A8 SB 7A	A2 SB 7A
A7 GND	C6 GND
A6 RX1-	C5 TX1-
A5 RX1+	C4 TX1+
A4 GND	C3/D6 GND
A3 RX0-	D5 TX0-
A2 RX0+	D4 TX0+
A1 GND	D3 GND

P1	P3
B37 GND	A9 GND
B36 TX7-	A8 RX3-
B35 TX7+	A7 RX3+
B34 GND	A6/B9 GND
B33 TX6-	B8 RX2-
B32 TX6+	B7 RX2+
B31 GND	B6 GND
B30 SB 6A	D1 SB 6A
B29 SB 2A	C1 SB 2A
B28 SB 8A	
B27 SB 1A	B1 SB 1A
B26 SB 0A	A1 SB 0A
B25 GND	A6 GND
B24 TX5-	A5 RX1-
B23 TX5+	A4 RX1+
B22 GND	A3/B6 GND
B21 TX4-	B5 RX0-
B20 TX4+	B4 RX0+
B19 GND	B3 GND
A37 GND	C9 GND
A36 RX7-	C8 TX3-
A35 RX7+	C7 TX3+
A34 GND	C6/D9 GND
A33 RX6-	D8 TX2-
A32 RX6+	D7 TX2+
A31 GND	D6 GND
A30 SB 5A	D2 SB 5A
A29 SB 4A	C2 SB 4A
A28 SB 9A	
A27 SB 3A	B2 SB 3A
A26 SB 7A	A2 SB 7A
A25 GND	C6 GND
A24 RX5-	C5 TX1-
A23 RX5+	C4 TX1+
A22 GND	C3/D6 GND
A21 RX4-	D5 TX0-
A20 RX4+	D4 TX0+
A19 GND	D3 GND

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING;
- WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- INSULATION RESISTANCE:10M Ohm(Min);
- CONDUCTIVE RESISTANCE:2 Ohm(Max).

13	MOLDING	PA BLACK	A/R	9
12	COVER	MINI SAS HD 4i PC BLACK	2	PCS
11	HOUSING	MINI SAS HD 4i PC BLACK	2	PCS
10	PCB	MINISAS HD 4i PCB(C/D),PIN: AU 15u&30u,100±10 ohm	2	PCS
9	PCB	MINISAS HD 4i PCB(A/B),PIN: AU 15u&30u,100±10 ohm	2	PCS
8	EXPANDO	PET BALCK OD: 10mm	A/R	M
7	ACETATE TAPE	W=25±5mm	A/R	M
6	MOLDING	LDPE,NATURAL	A/R	g
5	MOLDING	PBT+30GF% BLACK	A/R	g
4	PCB	SIMSAS 8i 74P PCB,PIN: AU 15U&30u, 88±8 ohm	1	PCS
3	LATCH	STAINLESS STEEL	1	PCS
2	CABLE	30AWG OD: 0.7mm	A/R	M
1	CABLE	32AWGx2C+2D+al.mylay+amylay, OD: 0.62x1.53, 85±5 ohm	A/R	M
NO.	名称	描述	Q'TY	UNITS



RENHOTECH GROUP

客户料号 Cus'P/N	料号 P/N	RHT-726-1003	品名 Name	Slim SAS SFF-8654 8i to HD Mini SAS 36P 2SFF-8643
未注公差 Unless Otherwise Specified	单位 Unit	mm	版本 Revision	R1.0
线性 Linear	0.5~6 ±0.2 >6~30 ±0.3 >30 ±2%	比例 Scale	—	—
角度Angles	±3°	页码 Page	—	—
Third Angle Projection		图纸确认 APPROVAL		
—		日期 Date		—
—		绘图 Drawing		Riky
—		审核 Checked		Jason
—		客户确认 Customer Approved		—