




发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2025.09.10

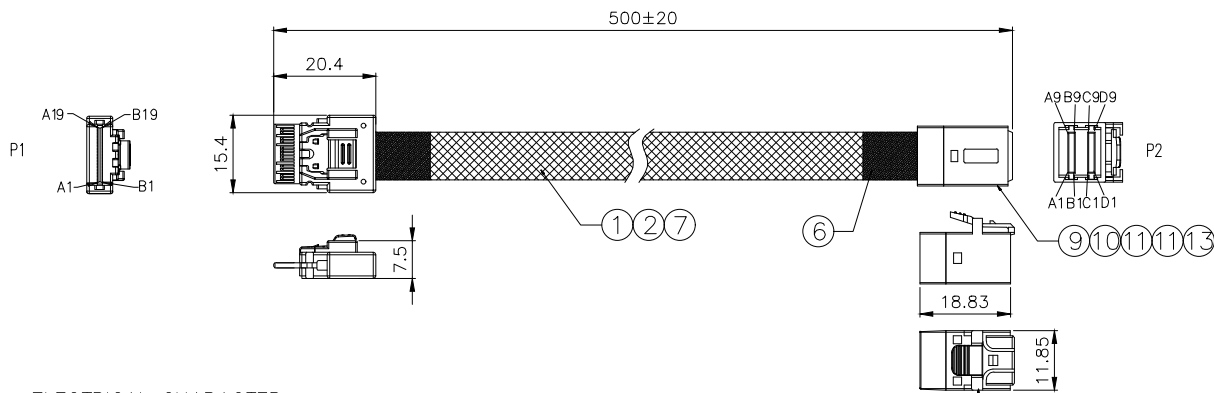

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING;
- WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- INSULATION RESISTANCE:10M Ohm(Min);
- CONDUCTIVE RESISTANCE:2 Ohm(Max).

P1	P2
A18 GND	C9 GND
A18 RX3-	C8 TX3-
A17 RX3+	C7 TX3+
A16 GND	C8/D9 GND
A15 RX2-	D8 TX2-
A14 RX2+	D7 TX2+
A13 GND	D6 GND
A12 SB 6A	D2 SB 6A
A11 SB 4A	C2 SB 4A
A10 SB 6A	
A9 SB 3A	B2 SB 3A
A8 SB 7A	A2 SB 7A
A7 GND	C6 GND
A6 RX1-	C5 TX1-
A5 RX1+	C4 TX1+
A4 GND	C3/D6 GND
A3 RX0-	D5 TX0-
A2 RX0+	D4 TX0+
A1 GND	D3 GND
B19 GND	A9 GND
B18 TX3-	A8 RX3-
B17 TX3+	A7 RX3+
B16 GND	A6/B9 GND
B15 TX2-	B8 RX2-
B14 TX2+	B7 RX2+
B13 GND	B6 GND
B12 SB 6A	D1 SB 6A
B11 SB 2A	C1 SB 2A
B10 SB 6A	
B9 SB 1A	B1 SB 1A
B8 SB 0A	A1 SB 0A
B7 GND	A6 GND
B6 TX1-	A5 RX1-
B5 TX1+	A4 RX1+
B4 GND	A3/B6 GND
B3 TX0-	B5 RX0-
B2 TX0+	B4 RX0+
B1 GND	B3 GND

13	MOLDING	PA BLACK	A/R	9
12	PCB	MINISAS HD 4I PCB(A/B),PIN: AU 15u&30u,100±10 ohm	1	PCS
11	PCB	MINISAS HD 4I PCB(C/D),PIN: AU 15u&30u,100±10 ohm	1	PCS
10	COVER	MINISAS HD 4I COVER PC BLACK	1	PCS
9	HOUSING	MINISAS HD 4I HOUSING PC BLACK	1	PCS
8	LATCH	STAINLESS STEEL	1	PCS
7	EXPANDO	PET BALCK DD: 10mm	A/R	mm
6	ACETATE TAPE	W=25±5mm,BLACK	25	mm
5	MOLDING	LDPE,NATURAL	A/R	9
4	MOLDING	PBT+30GF% BLACK	A/R	9
3	PCBA	SLIMSAS 38PIN PCB, PIN:15u&30u Au, 88±8 ohm	1	PCS
2	CABLE	30AWG CABLE,DD:0.65	A/R	mm
1	CABEL	(32AWG*2C+2D)AL+MYLAR,DD:0.65*1.54MM,85±5 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT



RENHOTEC GROUP

客户料号 Cus'P/N		料 号 P/N		RHT-726-1006		品 名 Name	SlimSAS SFF-8654 4i TO MiniSAS HD SFF-8643 Cable		
未注公差 Unless Otherwise Specified			单 位 Unit	mm	版 本 Revision	R1.0	图纸确认 APPROVAL		日期 Date
线性 Linear	0.5~6	±0.2	比 例 Scale	—			绘 图 Drawing	Riky	2025.09.10
	>6~30	±0.3					审 核 Checked	Jason	2025.09.10
	>30	±2%					客 户 确 认 Customer Approved		
角度Angles		±3°		Third Angle Projection					