




发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2025.09.10

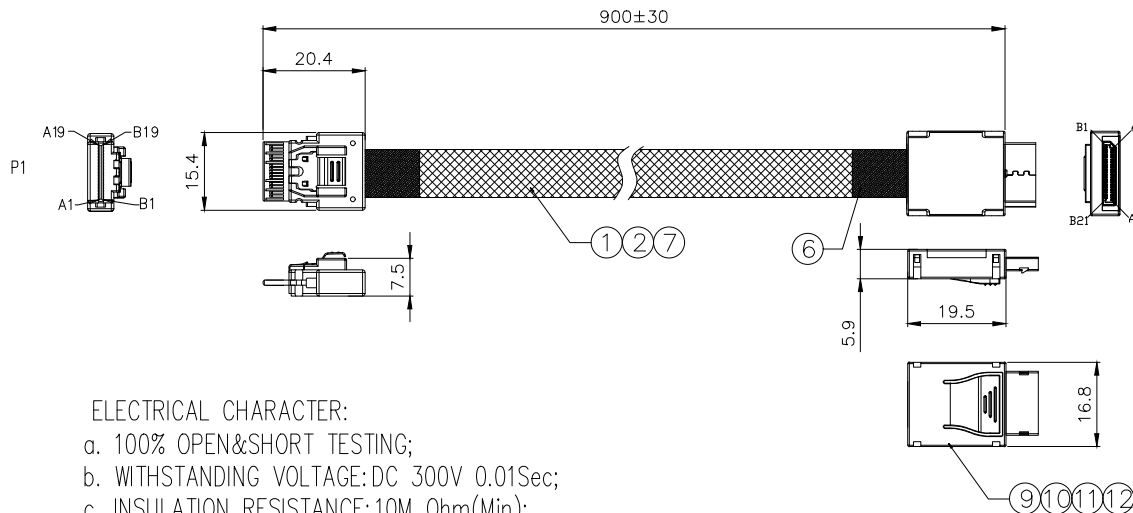

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING;
- WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- INSULATION RESISTANCE:10M Ohm(Min);
- CONDUCTIVE RESISTANCE:2 Ohm(Max).

P1		P2	
B19	GND	A20	GND
B18	TX3-	A19	RX3-
B17	TX3+	A18	RX3+
B16	GND	A17	GND
B15	TX2-	A16	RX2-
B14	TX2+	A15	RX2+
B13	GND	A14	GND
B12	SB 6A	A13	SB 6A
B11	SB 2A	A12	SB 2A
B10	SB 8A	A11	SB 8A
B9	SB 1A	A10	SB 1A
B8	SB 0A	A9	SB 0A
B7	GND	A8	GND
B6	TX1-	A7	RX1-
B5	TX1+	A6	RX1+
B4	GND	A5	GND
B3	TX0-	A4	RX0-
B2	TX0+	A3	RX0+
B1	GND	A2	GND
A19	GND	B20	GND
A18	RX3-	B19	TX3-
A17	RX3+	B18	TX3+
A16	GND	B17	GND
A15	RX2-	B16	TX2-
A14	RX2+	B15	TX2+
A13	GND	B14	GND
A12	SB 5A	B13	SB 5A
A11	SB 4A	B12	SB 4A
A10	SB 9A	B11	SB 9A
A9	SB 3A	B10	SB 3A
A8	SB 7A	B9	SB 7A
A7	GND	B8	GND
A6	RX1-	B7	TX1-
A5	RX1+	B6	TX1+
A4	GND	B5	GND
A3	RX0-	B4	TX0-
A2	RX0+	B3	TX0+
A1	GND	B2	GND

12	CONN	OCULINK 4I CONN PIN:AU 30u	1	pcs
11	PCB	OCULINK 4I PCB 88±8 ohm	1	pcs
10	HOOK	OCULINK 4I HOOK_UP PC+ABS, BLACK	1	pcs
9	HOOK	OCULINK 4I HOOK_DOWN PC+ABS, BLACK	1	pcs
8	LATCH	STAINLESS STEEL	1	pcs
7	EXPAND	PET BALCK DD: 10mm	A/R	mm
6	ACETATE TAPE	W=25±5mm,BLACK	A/R	mm
5	MOLDING	LDPE,NATURAL	A/R	9
4	MOLDING	PBT+30GF% BLACK	A/R	9
3	PCBA	MINI SAS 36PIN PCB, PIN:15u&30u Au, 88±8 ohm	1	PCS
2	CABLE	30AWG CABLE,DD:0.65	A/R	mm
1	CABEL	<32AWG*2C+2D>AL+MYLAR,DD:0.65*1.54MM,85±5 ohm.	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QTY	UNIT



RENHOTEC GROUP

客户料号 Cus'P/N		料 号 P/N		RHT-726-1007		品 名 Name	SlimSAS SFF-8654 4i TO Oculink SFF-8611 Cable	
未注公差 Unless Otherwise Specified		单 位 Unit	mm	版 本 Revision	R1.0	图纸确认 APPROVAL		日期 Date
线性 Linear	0.5~6	±0.2	比 例 Scale	—		绘 图 Drawing	Riky	2025.09.10
	>6~30	±0.3				审 核 Checked	Jason	2025.09.10
	>30	±2%						
角度Angles	±3°		页 码 Page	Third Angle Projection		客户确认 Customer Approved		