





发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2025.09.10

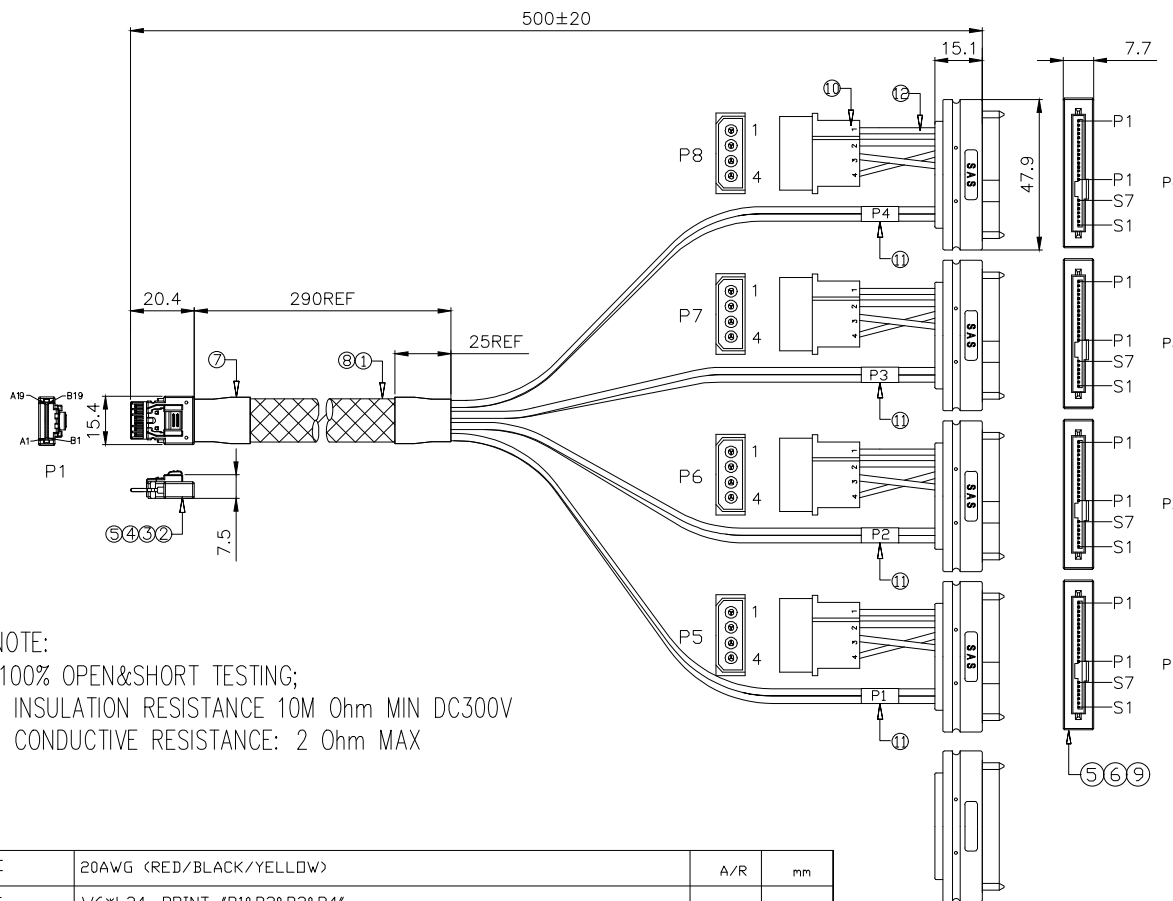

PIN ASSIGNMENT:

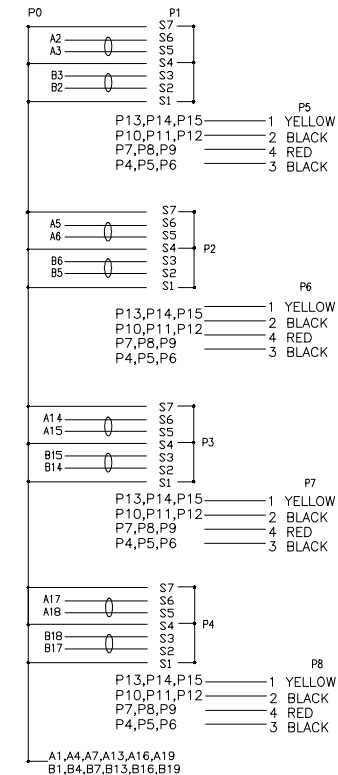

12	CABLE	20AWG (RED/BLACK/YELLOW)	A/R	mm
11	LABLE	W6*L24, PRINT "P1&P2&P3&P4"	4	pcs
10	CONN.	4P,NATURAL,PH5.08,PIN:G/F	4	pcs
9	CONN.	SAS 29P/F,PIN:G/F	4	pcs
8	EXPANDO	PET BALCK DD: 10mm	A/R	mm
7	ACETATE TAPE	W=25±5mm,BLACK	2	pcs
6	MOLDING	45P PVC BLACK	A/R	g
5	MOLDING	LDPE,NATURAL	A/R	g
4	MOLDING	PBT+30%GF BLACK	A/R	g
3	LATCH	STAINLESS STEEL	5	pcs
2	PCB	SLIMSAS 4I PCB, PIN:Au 15u&30u, 88±8 ohm	1	PCS
1	CABLE	(32AWG*2C+2d)*AL+MYLAR,DD:0.67*1.54MM,85±5 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT



RENHOTEC GROUP

客户料号 Cus'P/N		料 号 P/N		RHT-726-1008		品 名 Name	SlimSAS SFF-8654 4i TO SAS SFF-8482+ Big 4P Cable	
未注公差 Unless Otherwise Specified		单 位 Unit	mm	版 本 Revision	R1.0	图纸确认 APPROVAL		日期 Date
线性 Linear	0.5~6	±0.2	比 例 Scale	-- 		绘 图 Drawing	Riky	2025.09.10
	>6~30	±0.3				审 核 Checked	Jason	2025.09.10
	>30	±2%				客户确认 Customer Approved		
角度Angles	±3°		页 码 Page	Third Angle Projection				