
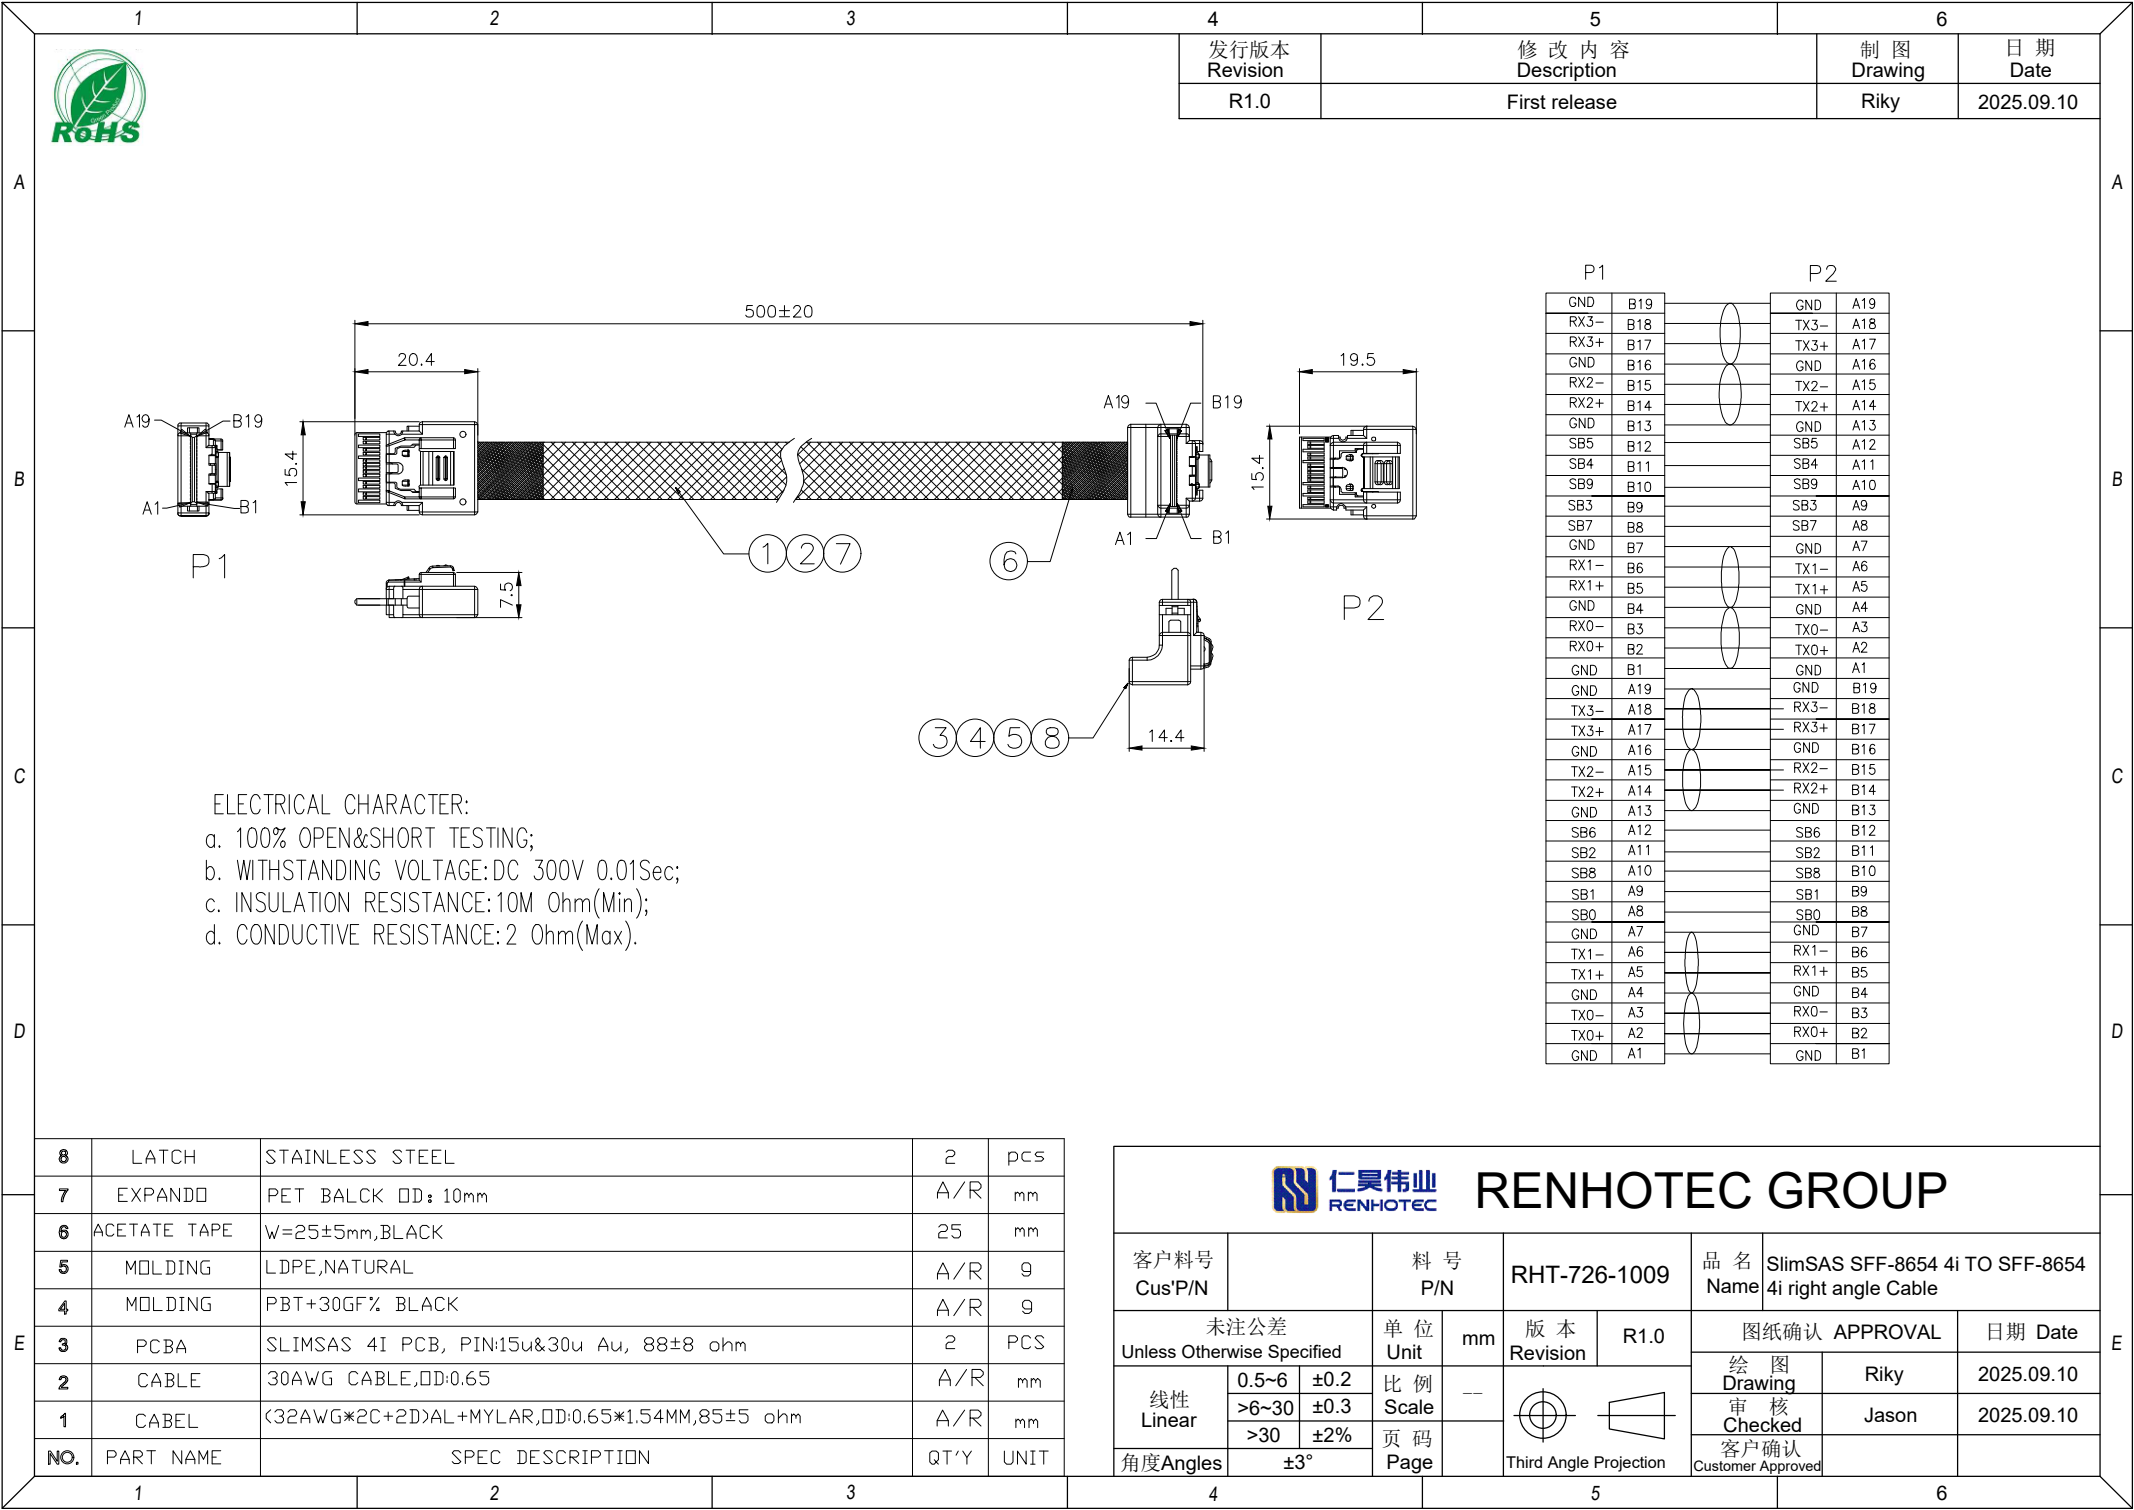




ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm(Max).

P1		P2	
GND	B19	GND	A19
RX3-	B18	TX3-	A18
RX3+	B17	TX3+	A17
GND	B16	GND	A16
RX2-	B15	TX2-	A15
RX2+	B14	TX2+	A14
GND	B13	GND	A13
SB5	B12	SB5	A12
SB4	B11	SB4	A11
SB9	B10	SB9	A10
SB3	B9	SB3	A9
SB7	B8	SB7	A8
GND	B7	GND	A7
RX1-	B6	TX1-	A6
RX1+	B5	TX1+	A5
GND	B4	GND	A4
RX0-	B3	TX0-	A3
RX0+	B2	TX0+	A2
GND	B1	GND	A1
GND	A19	GND	B19
TX3-	A18	RX3-	B18
TX3+	A17	RX3+	B17
GND	A16	GND	B16
TX2-	A15	RX2-	B15
TX2+	A14	RX2+	B14
GND	A13	GND	B13
SB6	A12	SB6	B12
SB2	A11	SB2	B11
SB8	A10	SB8	B10
SB1	A9	SB1	B9
SB0	A8	SB0	B8
GND	A7	GND	B7
TX1-	A6	RX1-	B6
TX1+	A5	RX1+	B5
GND	A4	GND	B4
TX0-	A3	RX0-	B3
TX0+	A2	RX0+	B2
GND	A1	GND	B1

8	LATCH	STAINLESS STEEL	2	pcs
7	EXPAND	PET BALCK OD: 10mm	A/R	mm
6	ACETATE TAPE	W=25±5mm,BLACK	25	mm
5	MOLDING	LDPE,NATURAL	A/R	g
4	MOLDING	PBT+30GF% BLACK	A/R	g
3	PCBA	SLIMSAS 4I PCB, PIN:15u&30u Au, 88±8 ohm	2	PCS
2	CABLE	30AWG CABLE,OD:0.65	A/R	mm
1	CABEL	(32AWG*2C+2D)AL+MYLAR,OD:0.65*1.54MM,85±5 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT

 仁昊伟业 RENHOTECH RENHOTECH GROUP					
客户料号 Cus'P/N		料号 P/N	RHT-726-1009	品名 Name	SlimSAS SFF-8654 4i TO SFF-8654 4i right angle Cable
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision	R1.0
线性 Linear	0.5~6	±0.2	比例 Scale		图纸确认 APPROVAL
	>6~30	±0.3			日期 Date
	>30	±2%			
角度Angles	±3°		页码 Page	Third Angle Projection	
				绘图 Drawing	Riky
				审核 Checked	Jason
				客户确认 Customer Approved	