




发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2024.06.17

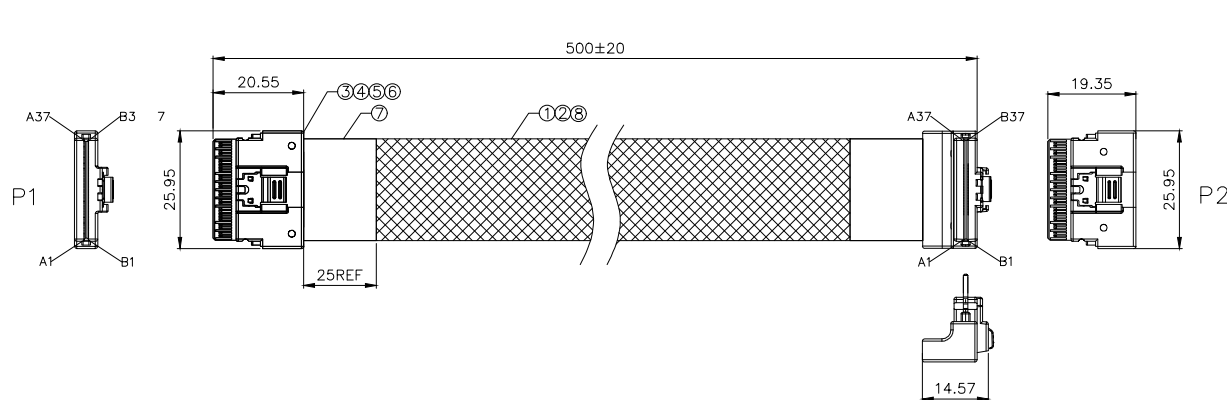

P1		P2	
A1	GND	B1	GND
A2	TX1+	B2	RX1+
A3	TX1-	B3	RX1-
A4	GND	B4	GND
A5	TX2+	B5	RX2+
A6	TX2-	B6	RX2-
A7	GND	B7	GND
A8	SIDEBAND	B8	SIDEBAND
A9	SIDEBAND	B9	SIDEBAND
A10	SIDEBAND	B10	SIDEBAND
A11	SIDEBAND	B11	SIDEBAND
A12	SIDEBAND	B12	SIDEBAND
A13	GND	B13	GND
A14	TX3+	B14	RX3+
A15	TX3-	B15	RX3-
A16	GND	B16	GND
A17	TX4+	B17	RX4+
A18	TX4-	B18	RX4-
A19	GND	B19	GND
A20	TX5+	B20	RX5+
A21	TX5-	B21	RX5-
A22	GND	B22	GND
A23	TX6+	B23	RX6+
A24	TX6-	B24	RX6-
A25	GND	B25	GND
A26	SIDEBAND	B26	SIDEBAND
A27	SIDEBAND	B27	SIDEBAND
A28	SIDEBAND	B28	SIDEBAND
A29	SIDEBAND	B29	SIDEBAND
A30	SIDEBAND	B30	SIDEBAND
A31	GND	B31	GND
A32	TX7+	B32	RX7+
A33	TX7-	B33	RX7-
A34	GND	B34	GND
A35	TX8+	B35	RX8+
A36	TX8-	B36	RX8-
A37	GND	B37	GND

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING;
- WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- INSULATION RESISTANCE:10M Ohm(Min);
- CONDUCTIVE RESISTANCE:2 Ohm(Max).
- Impedance: 85 Ohm
- Electrical and mechanical performance should meet the PCIe4.0 industrial standard.

8	LATCH	STAINLESS STEEL	2	pcs
7	EXPANDD	PET BALCK DD: 10mm	A/R	mm
6	ACETATE TAPE	W=25±5mm,BLACK	25	mm
5	MOLDING	LDPE,NATURAL	A/R	g
4	MOLDING	PBT+30GF% BLACK	A/R	g
3	PCBA	SLIMSAS 8I PCB, PIN:15u&30u Au, 88±8 ohm	2	PCS
2	CABLE	30AWG CABLE,DD:0.65	A/R	mm
1	CABEL	<32AWG*2C+2D>AL+MYLAR,DD:0.65*1.54MM,85±5 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT



RENHOTECH GROUP

客户料号 Cus'P/N	图号 Drawing No	RHT-726-1012	品名 Name	SlimSAS SFF-8654 8i TO SFF-8654 8i right angle Cable
未注公差 Unless Otherwise Specified	单位 Unit	mm	版本 Revision	R1.0
线性 Linear	0.5~6 >6~30 >30	±0.2 ±0.3 ±0.5	比例 Scale	1/1
角度Angles	±3°	页码 Page	1/1	Third Angle Projection
图纸确认 APPROVAL		日期 Date	2024.06.17	
绘图 Drawing		Riky	2024.06.17	
审核 Checked		Jason	2024.06.17	
客户确认 Customer Approved				