




发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2024.06.17

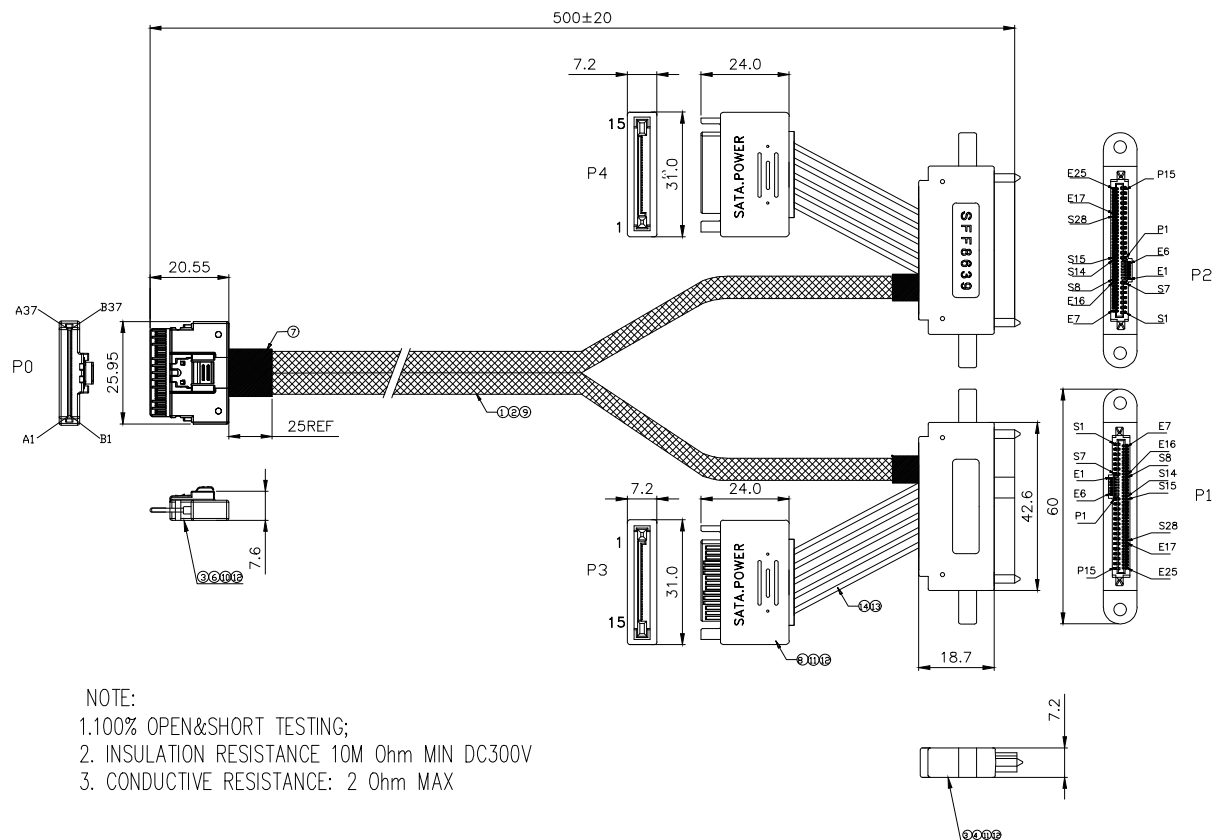

- NOTE:
- 100% OPEN&SHORT TESTING;
 - INSULATION RESISTANCE 10M Ohm MIN DC300V
 - CONDUCTIVE RESISTANCE: 2 Ohm MAX

P0	P1	P0	P2
GND B19	S28 GND	GND B37	S28 GND
PCIE_TX3- B18	E18 PCIE_TX3-	PCIE_TX7- B36	E18 PCIE_TX3-
PCIE_TX3+ B17	E17 PCIE_TX3+	PCIE_TX7+ B35	E17 PCIE_TX3+
GND B16	S22 GND	GND B34	S22 GND
PCIE_TX2- B15	S24 PCIE_TX2-	PCIE_TX6- B33	S24 PCIE_TX2-
PCIE_TX2+ B14	S23 PCIE_TX2+	PCIE_TX6+ B32	S23 PCIE_TX2+
GND B13	S28 GND	GND B31	S28 GND
SB6A B12	P10 SB6A	SB6B B30	P10 SB6B
SB2A B11	E5 SB2A	SB5B B29	E5 SB5B
SB8A B10	E22 SB8A	SB2B B28	E22 SB2B
SB1A B9	E24 SB1A	SB1B B27	E24 SB1B
SB0A B8	E23 SB0A	SB0B B26	E23 SB0B
GND B7	S16 GND	GND B25	S16 GND
PCIE_TX1- B6	S18 PCIE_TX1-	PCIE_TX5- B24	S18 PCIE_TX1-
PCIE_TX1+ B5	S17 PCIE_TX1+	PCIE_TX5+ B23	S17 PCIE_TX1+
GND B4	E12 GND	GND B22	E12 GND
PCIE_TX0- B3	E11 PCIE_TX0-	PCIE_TX4- B21	E11 PCIE_TX0-
PCIE_TX0+ B2	E10 PCIE_TX0+	PCIE_TX4+ B20	E10 PCIE_TX0+
GND B1	E12 GND	GND B19	E12 GND
GND A19	E19 GND	GND A37	E19 GND
PCIE_RX3- A18	E20 PCIE_RX3-	PCIE_RX7- A36	E20 PCIE_RX3-
PCIE_RX3+ A17	E21 PCIE_RX3+	PCIE_RX7+ A35	E21 PCIE_RX3+
GND A16	S25 GND	GND A34	S25 GND
PCIE_RX2- A15	S26 PCIE_RX2-	PCIE_RX6- A33	S26 PCIE_RX2-
PCIE_RX2+ A14	S27 PCIE_RX2+	PCIE_RX6+ A32	S27 PCIE_RX2+
GND A13	E9 GND	GND A31	E9 GND
SB5A A12	E8 SB5A	SB8- A30	E8 SB8-
SB4A A11	E7 SB4A	SB8+ A29	E7 SB8+
SB9A A10	P1 SB3A	SB3B A28	P1 SB4B
SB3A A9	S19 GND	SB4B A27	S19 GND
SB7A A8	A7	SB7B A26	A7
GND A7	S20 PCIE_RX1-	PCIE_RX5- A24	S20 PCIE_RX1-
PCIE_RX1- A6	S21 PCIE_RX1+	PCIE_RX5+ A23	S21 PCIE_RX1+
PCIE_RX1+ A5	E15 GND	GND A22	E15 GND
GND A4	E13 PCIE_RX0-	PCIE_RX4- A21	E13 PCIE_RX0-
PCIE_RX0- A3	E14 PCIE_RX0+	PCIE_RX4+ A20	E14 PCIE_RX0+
PCIE_RX0+ A2	GND A19	GND	E12 GND
GND A1			

P1/P2	E3	P1	P2	P3	P4	P5	P6	P7	P8	P9		P12	P13	P14	P15
P3/P4	P1P2P3	----				P4P5P6	P7P8P9		P10P11P12			P13P14P15			
SYMBOL	3.3V	----				GND	5V		GND			12V			
WIRE AWG	24AWG	----				20AWG	20AWG		24AWG			20AWG			

⑭	CABLE	24AWG (RED/BLACK)	A/R	M
⑬	CABLE	20AWG (RED/BLACK/YELLOW)	A/R	M
⑫	MOLDING	LDPE,NATURAL	A/R	KG
⑪	MOLDING	45P PVC BLACK	A/R	KG
⑩	MOLDING	PBT+30GF% BLACK	A/R	KG
⑨	EXPANDO	PET BALCK DD: 10mm	A/R	M
⑧	CONN.	15PIN SATA/M G/F BLACK	1	PCS
⑦	ACETATE TAPE	W=25±5mm	A/R	M
⑥	LATCH	STAINLESS STEEL	1	PCS
⑤	PCB	SLIMSAS 8I PCB, PIN15u&30u Au, 88±8 ohm	1	PCS
④	CONN	SAS 68P/F PINAu 15u BLACK	2	PCS
③	PCB	MINISAS 68P PCB, FR4, 88±8 ohm	2	PCS
②	CABLE	30AWG CABLE	A/R	M
①	CABLE	(32AWG*2C+2d)*AI+MYLAR,DD0.65*1.52MM,85±5 ohm	A/R	M
NO.	NAME	MATERIAL DESCRIPTION	D'TY	UNIT

仁昊伟业 RENHOTECH GROUP									
客户料号 Cus'P/N		图号 Drawing No		RHT-726-1018		品名 Name		SlimSAS SFF-8654 8i TO U.2 2xSFF-8639+15PIN Cable With ears	
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision	R1.0	图纸确认 APPROVAL		日期 Date	
线性 Linear		0.5~6 ±0.2		比例 Scale	—	绘图 Drawing		Riky	
		>6~30 ±0.3				审核 Checked		Jason	
		>30 ±0.5		页码 Page	1 / 1	客户确认 Customer Approved			
角度Angles		±3°		Third Angle Projection					