



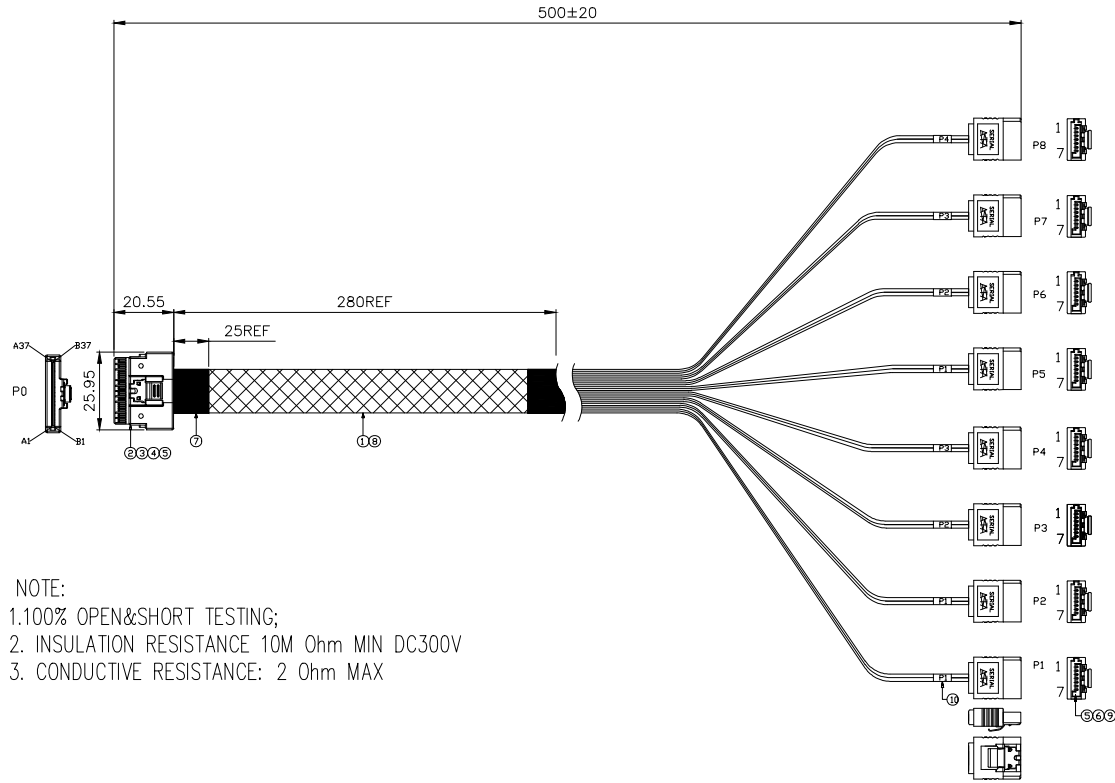

NOTE:
1.100% OPEN&SHORT TESTING;
2. INSULATION RESISTANCE 10M Ohm MIN DC300V
3. CONDUCTIVE RESISTANCE: 2 Ohm MAX

10	LABLE	W6*L24, PRINT "P1&P2&P3&P4&P5&P6&P7&P8"	8	pcs
9	CONN.	SATA 7P/F,PIN:G/F	8	pcs
8	EXPANDD	PET BLACK DD: 10mm	A/R	mm
7	ACETATE TAPE	W=25±5mm,BLACK	2	pcs
6	MOLDING	45P PVC BLACK	A/R	g
5	MOLDING	LDPE,NATURAL	A/R	g
4	MOLDING	PBT+30%GF BLACK	A/R	g
3	LATCH	STAINLESS STEEL	9	pcs
2	PCB	SLIMSAS 8I PCB, PIN:Au 15u&30u, 88±8 ohm	1	PCS
1	CABLE	(32AWG*2C+2d)*AL+MYLAR,DD:0.67*1.54MM,85±5 ohm.	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT

发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2024.06.17

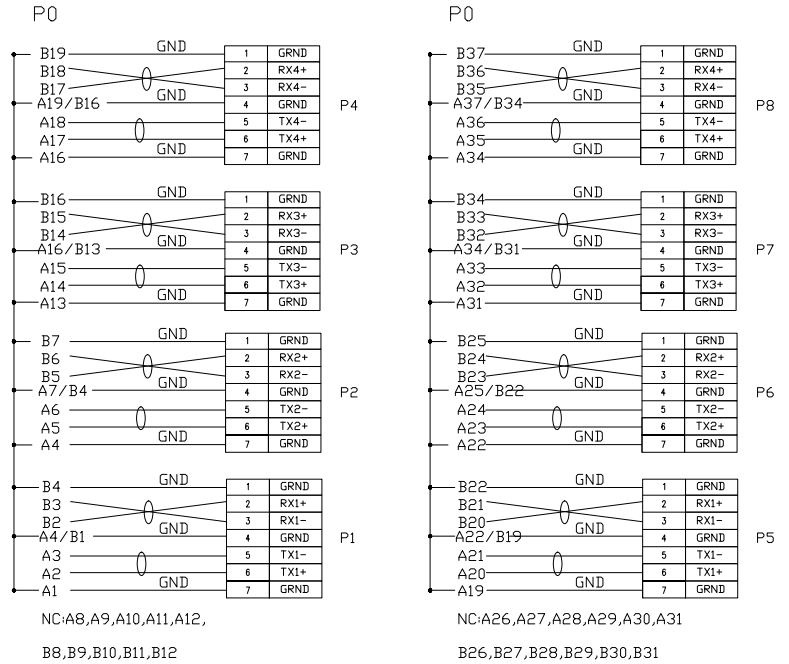

RENHOTECH GROUP

客户料号 Cus'P/N	图号 Drawing No	RHT-726-1019	品名 Name	SlimsSAS SFF-8654 8i TO 8xSATA Cable
未注公差 Unless Otherwise Specified	单位 Unit	mm	版本 Revision	R1.0
线性 Linear	0.5~6 ±0.2 >6~30 ±0.3 >30 ±0.5	比例 Scale	1/1	Third Angle Projection
角度Angles	±3°	页码 Page	1/1	
图纸确认 APPROVAL		日期 Date		
绘图 Drawing		Riky	2024.06.17	
审核 Checked		Jason	2024.06.17	
客户确认 Customer Approved				