





发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2025.09.10

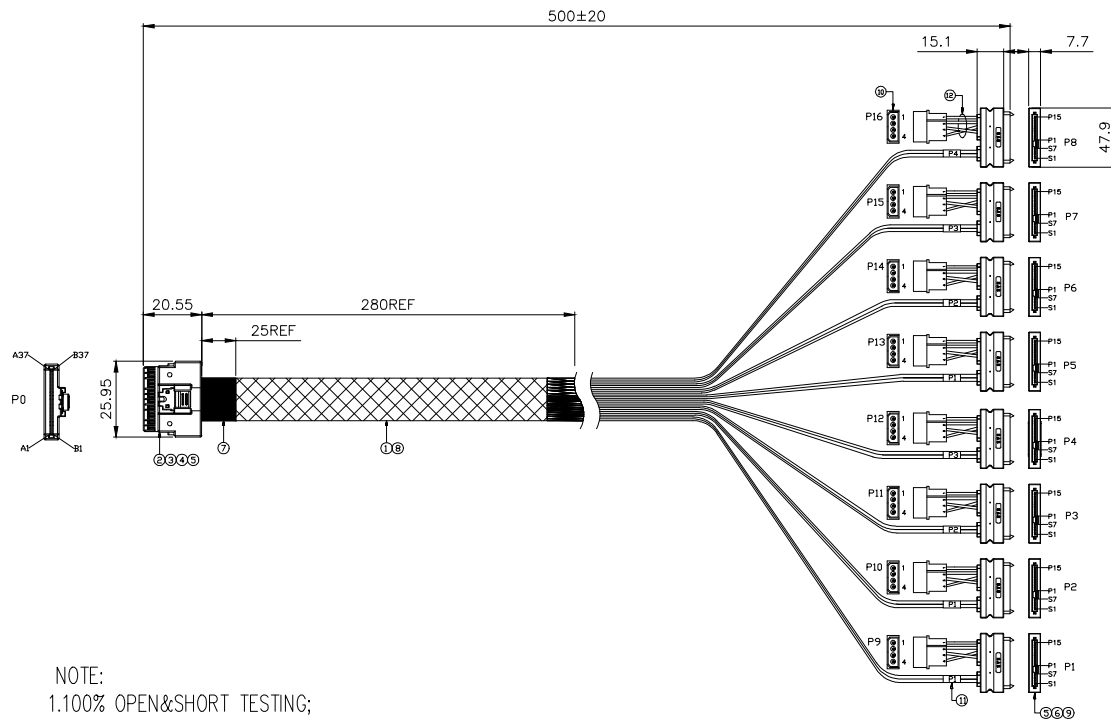

- NOTE:
- 100% OPEN&SHORT TESTING;
 - INSULATION RESISTANCE 10M Ohm MIN DC300V
 - CONDUCTIVE RESISTANCE: 2 Ohm MAX

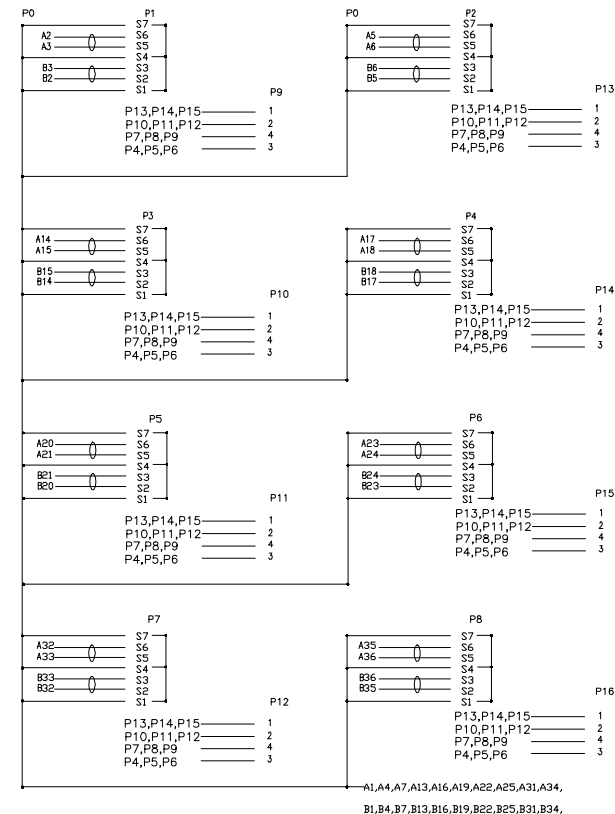

12	CABLE	20AWG (RED/BLACK/YELLOW)	A/R	mm
11	LABLE	W6*L24, PRINT "P1&P2&P3&P4&P5&P6&P7&P8"	8	pcs
10	CONN.	4P,NATURAL,PH5.08,PIN/G/F	8	pcs
9	CONN.	SAS 29P/F,PIN/G/F	8	pcs
8	EXPANDD	PET BALCK DD: 10mm	A/R	mm
7	ACETATE TAPE	W=25±5mm,BLACK	2	pcs
6	MOLDING	45P PVC BLACK	A/R	g
5	MOLDING	LDPE,NATURAL	A/R	g
4	MOLDING	PBT+30%GF BLACK	A/R	g
3	LATCH	STAINLESS STEEL	1	pcs
2	PCB	SLIMSAS 8I PCB, PINAu 15u&30u, 88±8 ohm	1	PCS
1	CABLE	(32AWG*2C+2d)*AL+MYLAR,DD:0.67*1.54MM,85±5 ohm.	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT



RENHOTEC GROUP

客户料号 Cus'P/N		料号 P/N	RHT-726-1022	品名 Name	SlimSAS SFF 8654 8i TO SAS 8xSFF-8482+Big 4P Cable
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision	R1.0
线性 Linear	0.5~6	±0.2	比例 Scale	第三角投影 Third Angle Projection	图纸确认 APPROVAL
	>6~30	±0.3			日期 Date
	>30	±2%			
角度Angles	±3°		页码 Page	客户确认 Customer Approved	