





发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2024.06.17

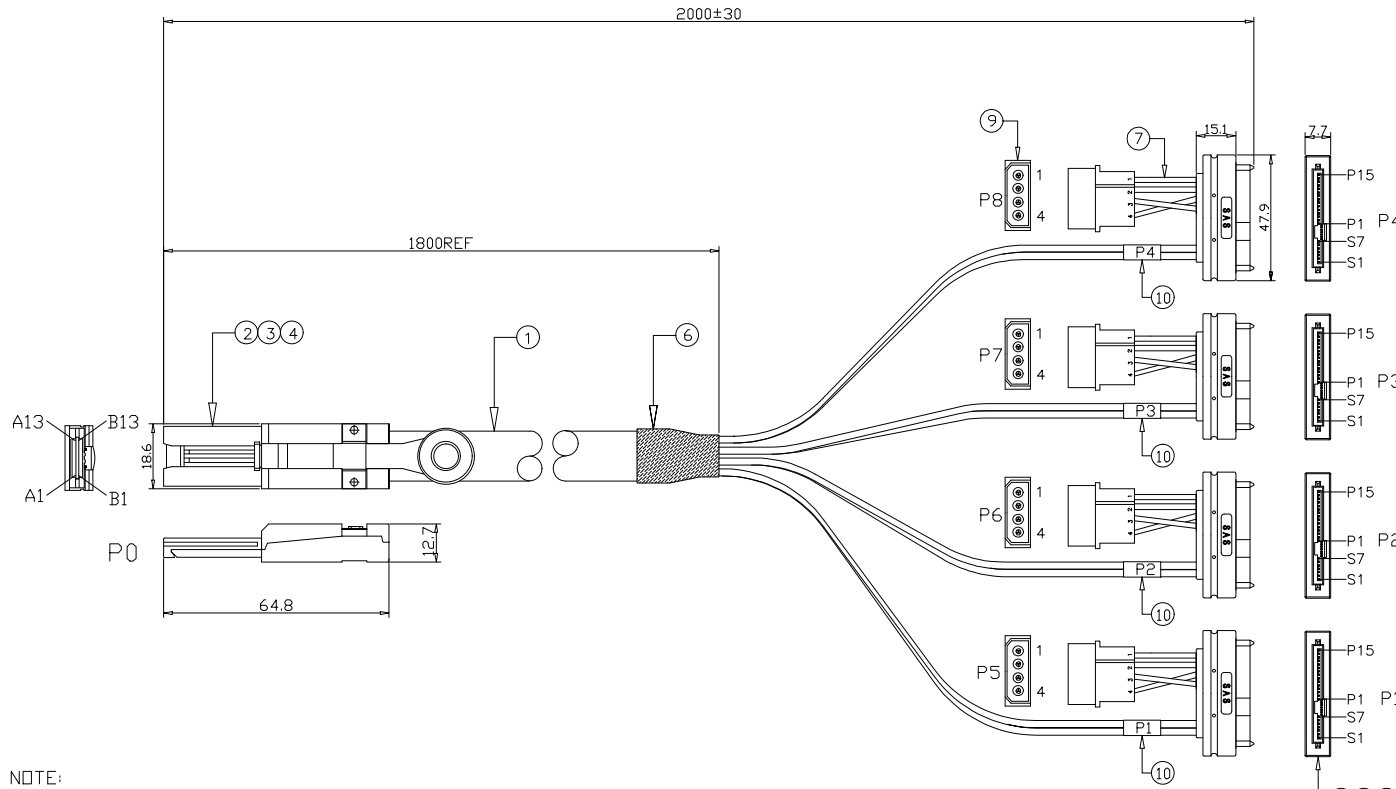

PIN ASSIGNMENT:

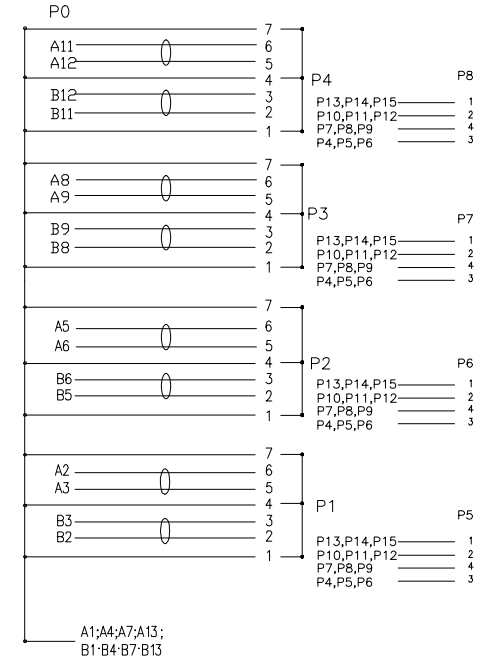

NOTE:
1.100%OPEN&SHORT TESTIGN,
2.INSULATION RESISTANCE 10M Ohm MIN DC300V
3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

10	LABLE	W6*L24, PRINT "P1&P2&P3&P4"	4	pcs
9	CONN.	4P,NATURAL,PH5.08,PIN:G/F	4	pcs
8	CONN.	SAS 29P/F,PIN:G/F	4	pcs
7	CABLE	20AWG (RED/BLACK/YELLOW)	A/R	mm
6	ACETATE TAPE	W=25±5mm,BLACK	1	pcs
5	MOLDING	45P PVC BLACK	A/R	g
4	MOLDING	LDPE,NATURAL	A/R	g
3	ASSEMBLY PARTS	ASSEMBLY PARTS (Zinc ALLOY HOODS, HOOK,PULL-TAB, RUBBER RING)	1	set
2	PCB	MINI SAS 26P PCBA, PIN,15u Au, 100±10 Ohm	1	pcs
1	CABLE	(28AWG*2C+D+HMAM+HM)*8C+M+AM+B,OD:7.5±0.15MM,BLACK PVC 100±5 Ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT



RENHOTECH GROUP

客户料号 Cus' P/N	图号 Drawing No	RHT-726-2006	品名 Name	MiniSAS SFF-8088 TO SAS 4xSFF-8482+Big 4P Cable
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision
线性 Linear		0.5~6 ±0.2 >6~30 ±0.3 >30 ±0.5	比例 Scale	1/1
角度Angles		±3°	页码 Page	1/1
Third Angle Projection		图纸确认 APPROVAL	日期 Date	2024.06.17
客户确认 Customer Approved		审核 Checked	Riky	2024.06.17
		审核 Checked	Jason	2024.06.17