






PIN ASSIGNMENT:

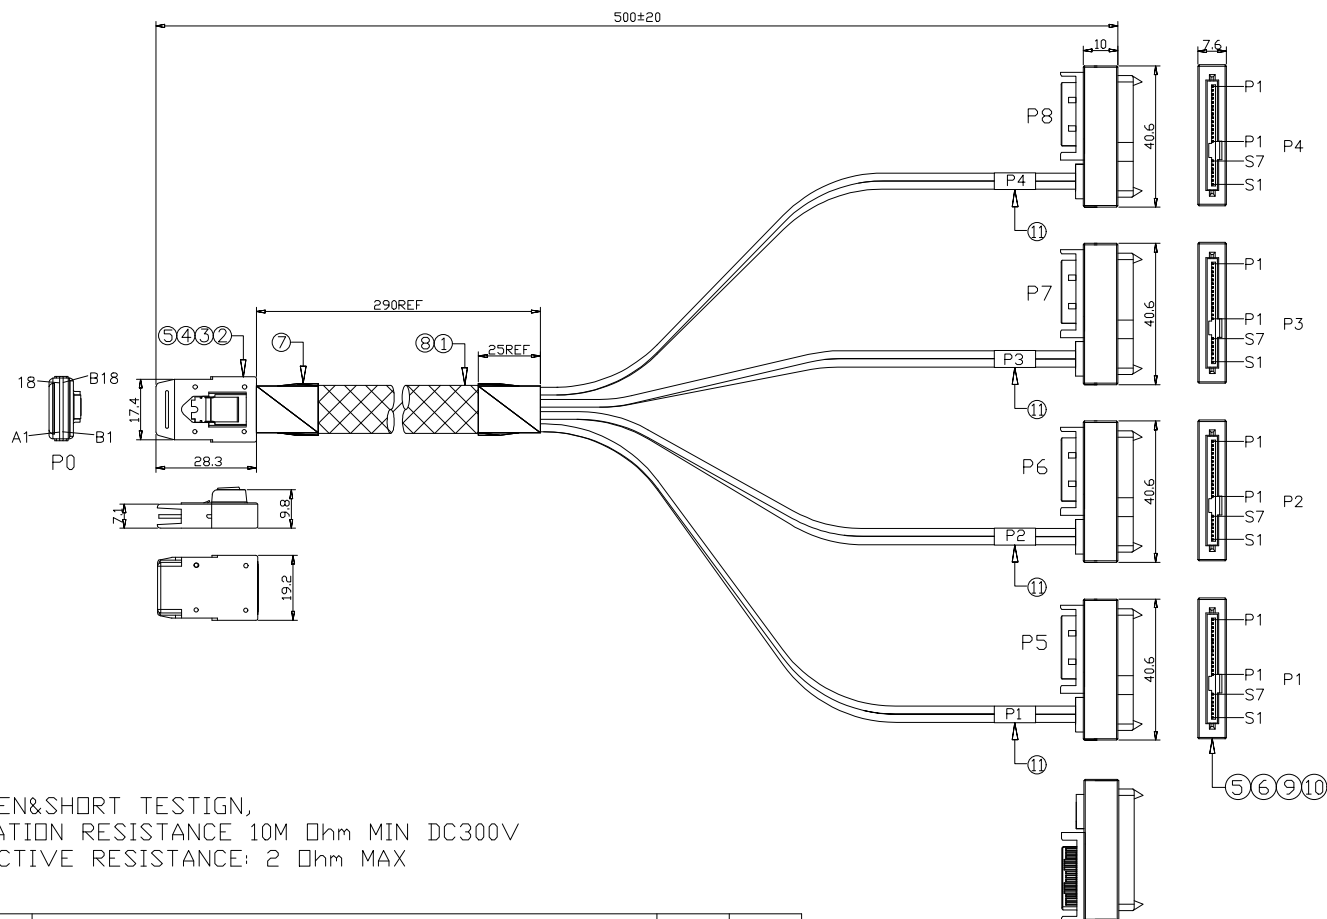

11	LABLE	W6*L24, PRINT "P1&P2&P3&P4"	4	pcs
10	CONN.	SATA 15P/M,PIN:G/F	4	pcs
9	CONN.	SAS 29P/F,PIN:G/F	4	pcs
8	EXPANDO	PET BLACK DD: 10mm	A/R	mm
7	ACETATE TAPE	W=25±5mm,BLACK	2	pcs
6	MOLDING	45P PVC BLACK	A/R	g
5	MOLDING	LDPE,NATURAL	A/R	g
4	MOLDING	PBT+30%GF BLACK	A/R	g
3	LATCH	STAINLESS STEEL	5	pcs
2	PCB	MINI SAS 36PIN PCB, PIN:Au 15u", 100±10 ohm	1	PCS
1	CABLE	(30AWG*2C+2d)*AL+MYLAR,DD:0.97*2.17MM,100±5 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QTY	UNIT

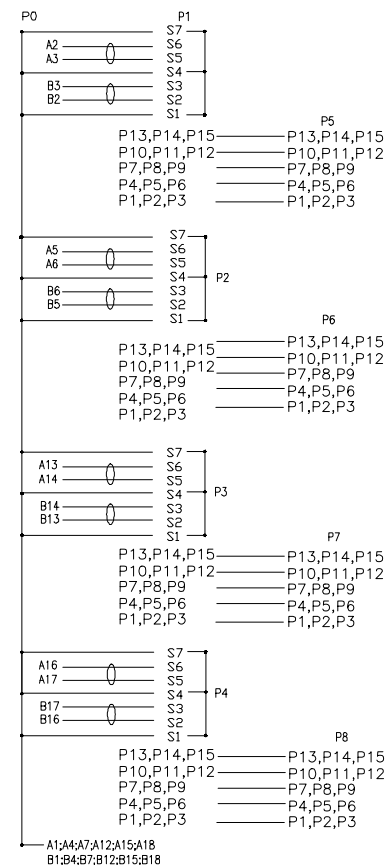

客户料号 Cus' P/N		图 号 Drawing No		RHT-726-2008		品 名 Name	MINI SAS SFF-8087 to 4xSFF-8482 cable		
未注公差 Unless Otherwise Specified		单 位 Unit	mm	版 本 Revision	R1.0	图纸确认 APPROVAL		日期 Date	
线性 Linear	0.5~6 ±0.2	比 例 Scale	—			绘 图 Drawing	Riky	2024. 06. 17	
	>6~30 ±0.3	页 码 Page	1 / 1			审 核 Checked	Jason	2024. 06. 17	
角度Angles	±3°					Third Angle Projection		客户确认 Customer Approved	