





发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2024.06.17

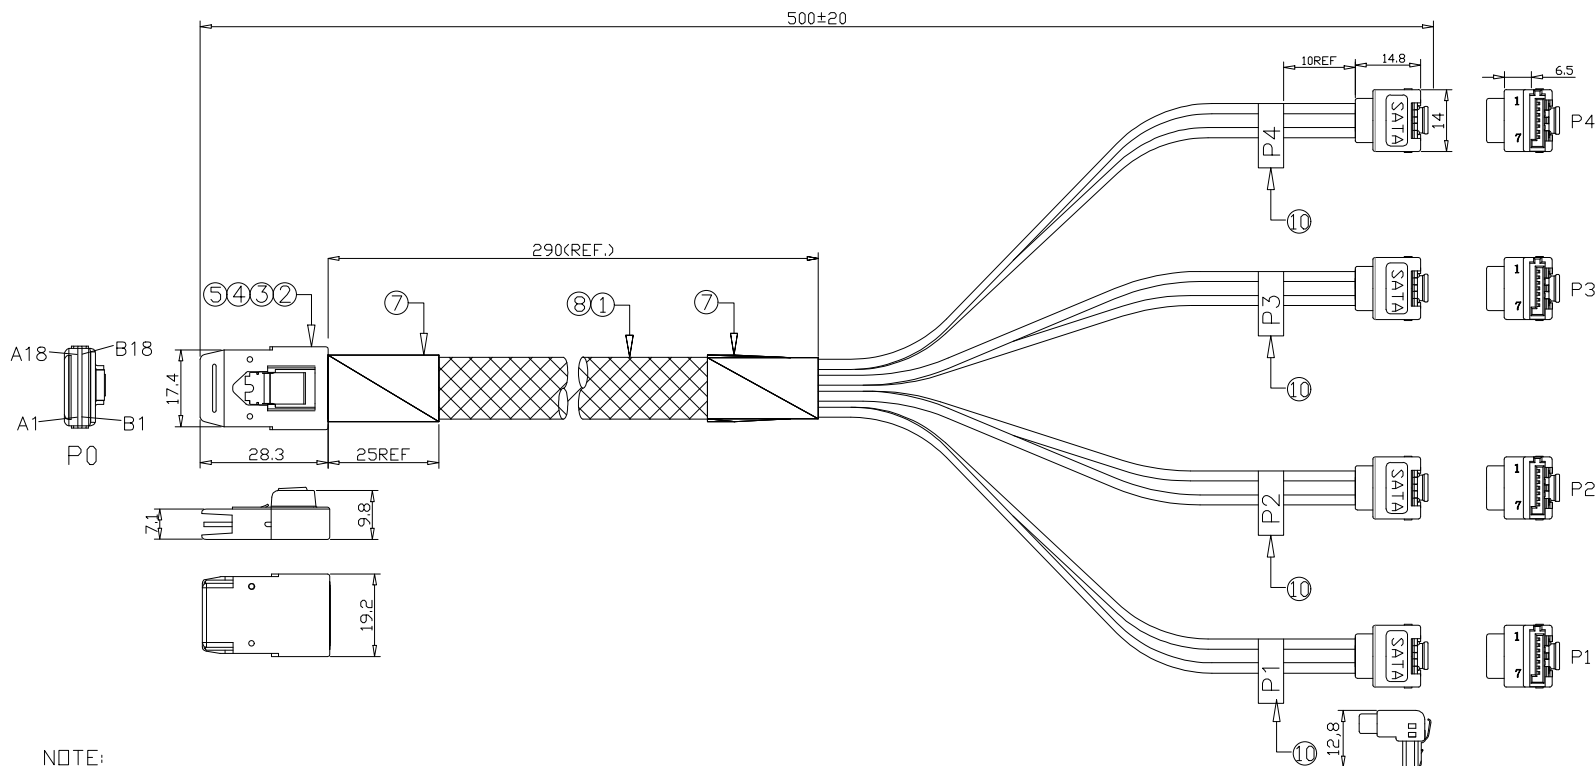

PIN ASSIGNMENT:

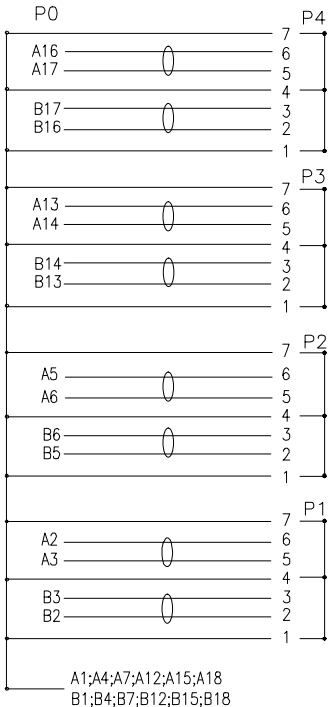

NOTE:
1.100%OPEN&SHORT TESTIGN,
2.INSULATION RESISTANCE 10M Ohm MIN DC300V
3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

10	LABLE	W6*L24 PRINT "P1&P2&P3&P4"	4	pcs
9	CONN.	SATA 7P/F,PING/F	4	pcs
8	EXPANDD	PET BALCK DD: 10mm	A/R	mm
7	ACETATE TAPE	W=25±5mm,BLACK	2	pcs
6	MOLDING	45P PVC BLACK	A/R	g
5	MOLDING	LDPE,NATURAL	A/R	g
4	MOLDING	PBT+30%GF BLACK	A/R	g
3	LATCH	STAINLESS STEEL	5	pcs
2	PCB	MINI SAS 36PIN PCB, PIN:Au 15u", 100±10 ohm	1	PCS
1	CABLE	(30AWG*2C+2d)*AL+MYLAR,DD:0.97*2.17MM,100±5 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT

**RENHOTECH GROUP**

客户料号 Cus' P/N	图号 Drawing No	RHT-726-2010	品名 Name	Mini sas SFF-8087 stright to 4xSATA right angle	
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision	R1.0
线性 Linear		0.5~6 ±0.2 >6~30 ±0.3 >30 ±0.5	比例 Scale	图纸确认 APPROVAL	
角度Angles		±3°	页码 Page	日期 Date	
			1/1	2024.06.17	
				2024.06.17	
				客户确认 Customer Approved	