





发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2024.06.17

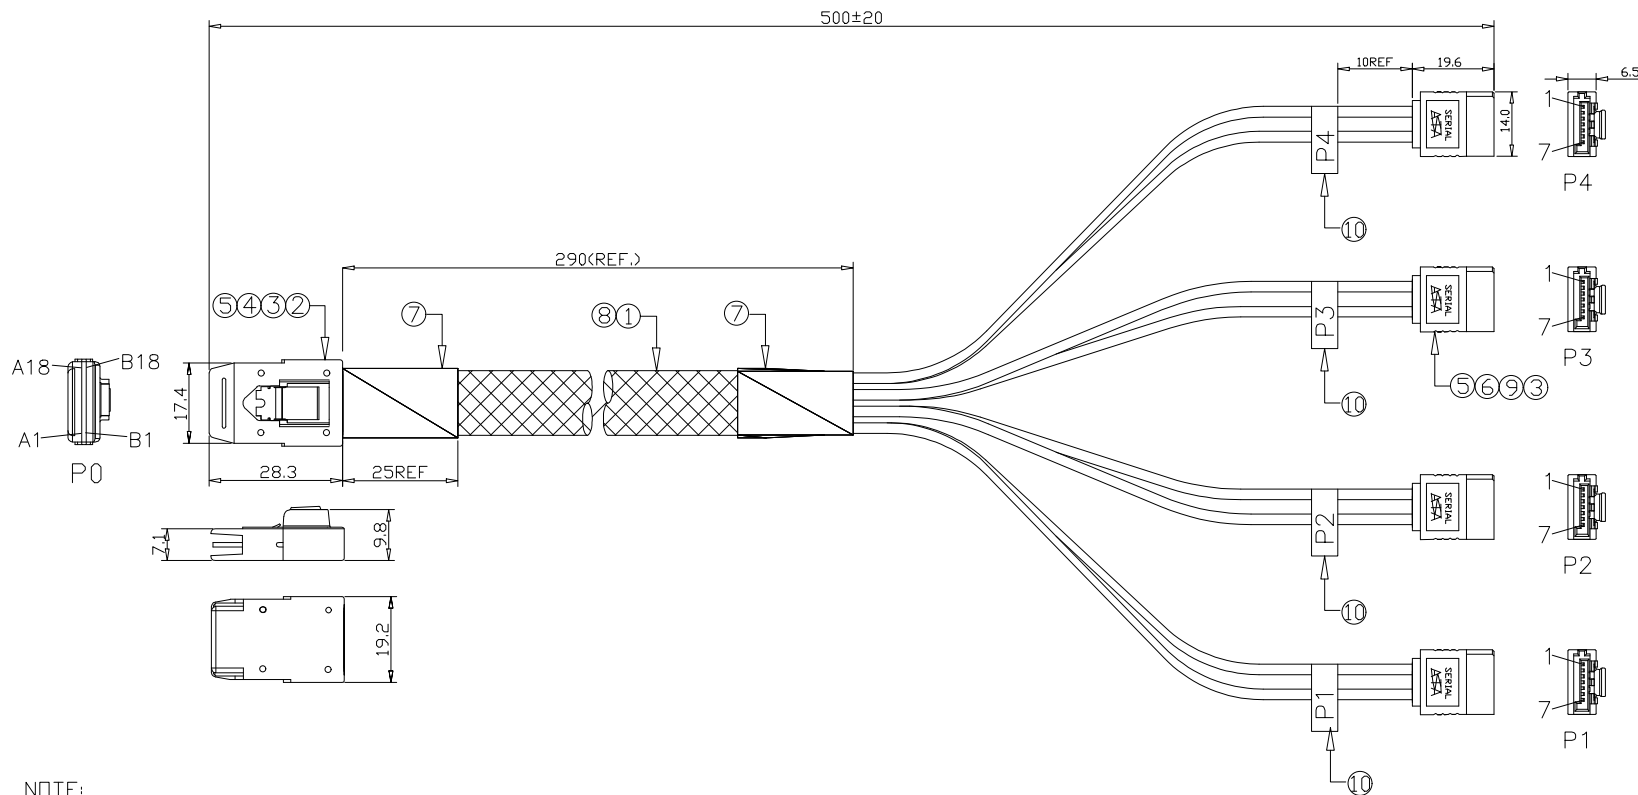

PIN ASSIGNMENT:

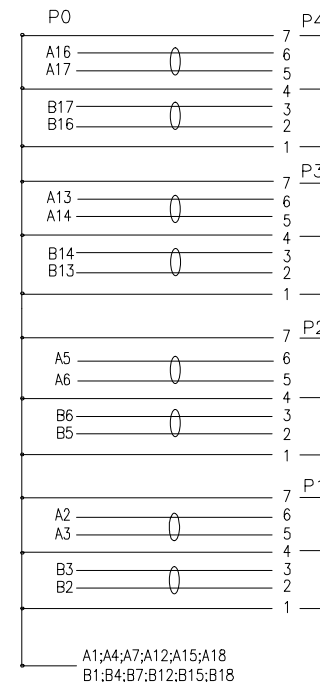

NOTE:
1.100%OPEN&SHORT TESTIGN,
2.INSULATION RESISTANCE 10M Ω hm MIN DC300V
3.CONDUCTIVE RESISTANCE: 2 Ω hm MAX

10	LABLE	W6*L24, PRINT "P1&P2&P3&P4"	4	pcs
9	CONN.	SATA 7P/F,PING/F	4	pcs
8	EXPANDD	PET BALCK DD: 10mm	A/R	mm
7	ACETATE TAPE	W=25±5mm,BLACK	2	pcs
6	MOLDING	45P PVC BLACK	A/R	g
5	MOLDING	LDPE,NATURAL	A/R	g
4	MOLDING	PBT+30%GF BLACK	A/R	g
3	LATCH	STAINLESS STEEL	5	pcs
2	PCB	MINI SAS 36PIN PCB, PIN:AU 15u", 100±10 ohm	1	PCS
1	CABLE	(30AWG*2C+2d)*AL+MYLAR,OD:0.97*2.17MM,100±5 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT



RENHOTECH GROUP

客户料号 Cus'P/N	图号 Drawing No	RHT-726-2012	品名 Name	Mini SAS SFF-8087 36P to 4xSATA 7P
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision
线性 Linear		比例 Scale	1/1	日期 Date
角度Angles		页码 Page	1/1	日期 Date
第三角投影 Third Angle Projection		图纸确认 APPROVAL	日期 Date	日期 Date
		绘图 Drawing	Riky	2024.06.17
		审核 Checked	Jason	2024.06.17
		客户确认 Customer Approved		