




发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2024.06.17

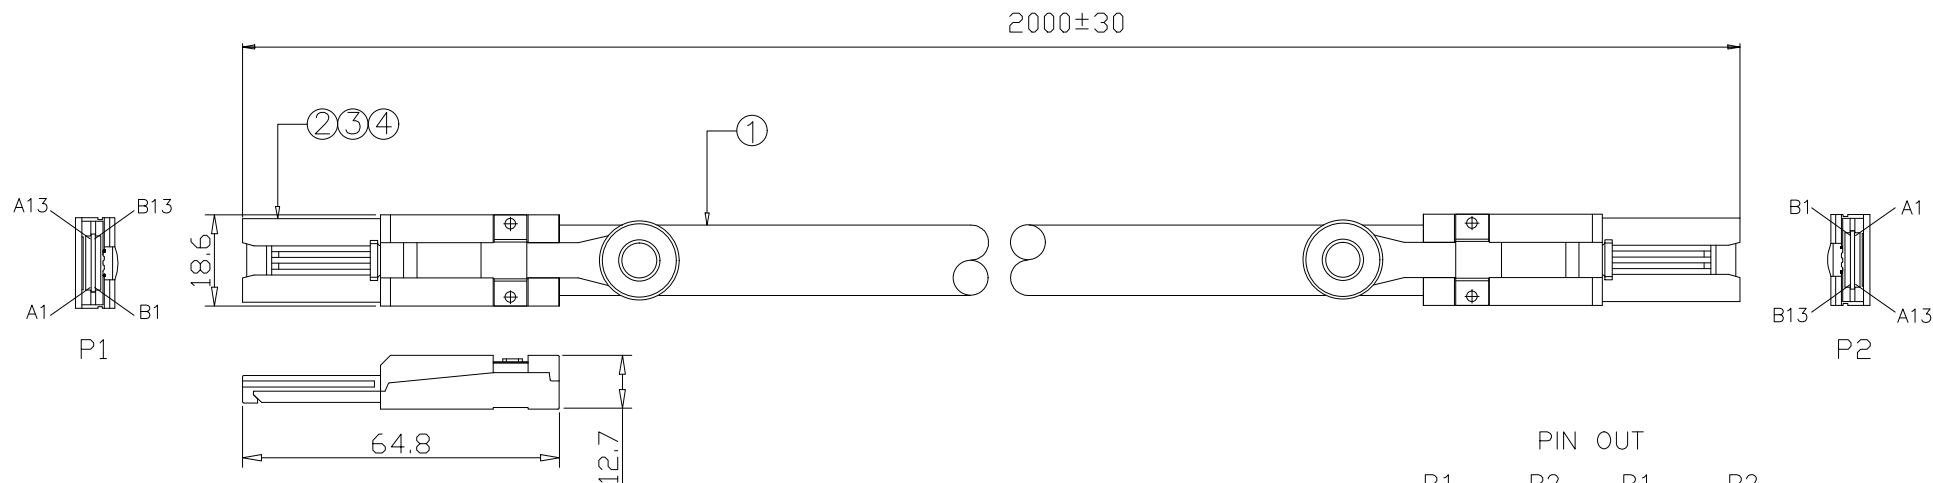

PIN OUT

P1	P2	P1	P2
A1	B1	B1	A1
A2	B2	B2	A2
A3	B3	B3	A3
A4	B4	B4	A4
A5	B5	B5	A5
A6	B6	B6	A6
A7	B7	B7	A7
A8	B8	B8	A8
A9	B9	B9	A9
A10	B10	B10	A10
A11	B11	B11	A11
A12	B12	B12	A12
A13	B13	B13	A13

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING;
- WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- INSULATION RESISTANCE:10M Ohm(Min);
- CONDUCTIVE RESISTANCE:2 Ohm(Max).

4	PLASTIC	LDPE ROHS	A/R	KG
3	ASSEMBLY PARTS	ASSEMBLY PARTS (Zinc ALLOY HOODS, HOOK,PULL-TAB, RUBBER RING)	2	set
2	PCBA	MINI SAS 26P PCBA, PIN,15u Au, 100±10 Ohm	2	PCS
1	CABLE	(28AWG*2C+D+HMAM+HM)*8C+M+AM+B,OD:7.5±0.15MM,BLACK PVC JACKET 100±5 Ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT



RENHOTECH GROUP

客户料号 Cus' P/N	图号 Drawing No	RHT-726-2017	品名 Name	External MINI SAS SFF-8088 26P to SFF-8088 26P
未注公差 Unless Otherwise Specified	单位 Unit	mm	版本 Revision	R1.0
线性 Linear	0.5~6 >6~30 >30	±0.2 ±0.3 ±0.5	比例 Scale	1/1
角度Angles	±3°	第三角投影 Third Angle Projection	客户确认 Customer Approved	