





发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2024.06.17

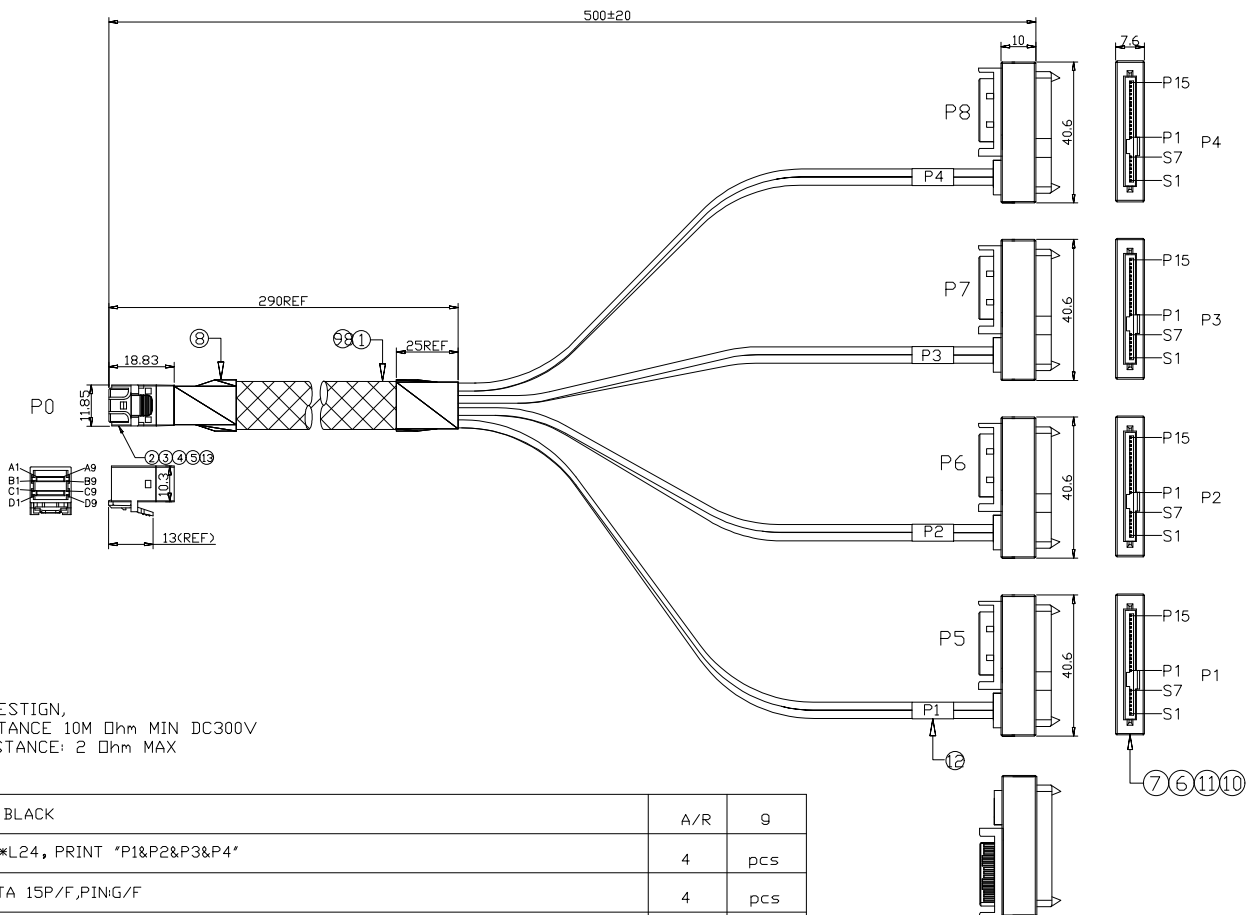

PIN ASSIGNMENT:

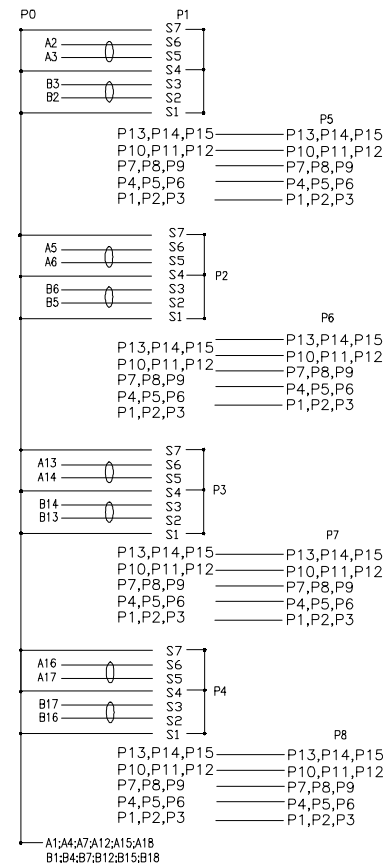

NOTE:
1.100%OPEN&SHORT TESTIGN,
2.INSULATION RESISTANCE: 10M Ohm MIN DC300V
3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

13	MOLDING	PA BLACK	A/R	9
12	LABLE	W6*L24, PRINT "P1&P2&P3&P4"	4	pcs
11	CONN.	SATA 15P/F,PING/F	4	pcs
10	CONN.	SAS 29P/F,PING/F	4	pcs
9	EXPANDD	PET BALCK OD: 10mm	A/R	mm
8	ACETATE TAPE	W=25±5mm,BLACK	A/R	mm
7	MOLDING	45P PVC BLACK	A/R	9
6	MOLDING	LDPE,NATURAL	A/R	9
5	COVER	MINI SAS HD 4I PC BLACK	1	PCS
4	HOUSING	MINI SAS HD 4I PC BLACK	1	PCS
3	PCB	MINI SAS HD 4I PCB(C/D),PIN: AU 15u&30u,100±10 ohm	1	PCS
2	PCB	MINI SAS HD 4I PCB(C/D),PIN: AU 15u&30u,100±10 ohm	1	PCS
1	CABLE	(30AWG*2C+2d)*AL+MYLAR,OD:0.97*2.17MM,100±5 ohm.	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT



RENHOTECH GROUP

客户料号 Cus'P/N	图号 Drawing No	RHT-726-3004	品名 Name	HD Mini SAS SFF-8643 36P to SAS 4SFF-8482 22P
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision
线性 Linear		比例 Scale	—	日期 Date
角度Angles		页码 Page	1/1	日期 Date
第三角投影 Third Angle Projection		图纸确认 APPROVAL	日期 Date	日期 Date
客户确认 Customer Approved		日期 Date	日期 Date	日期 Date