





发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2024.06.17

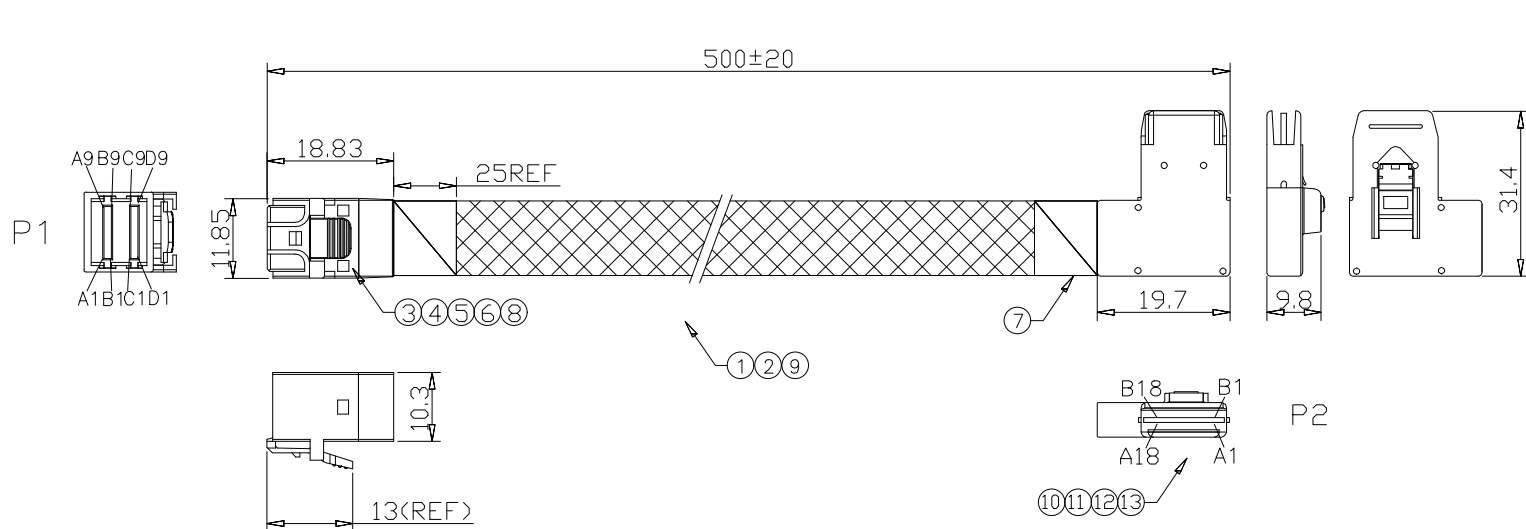

NOTE:
1.100%OPEN&SHORT TESTIGN,
2.INSULATION RESISTANCE 10M Ohm MIN DC300V
3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

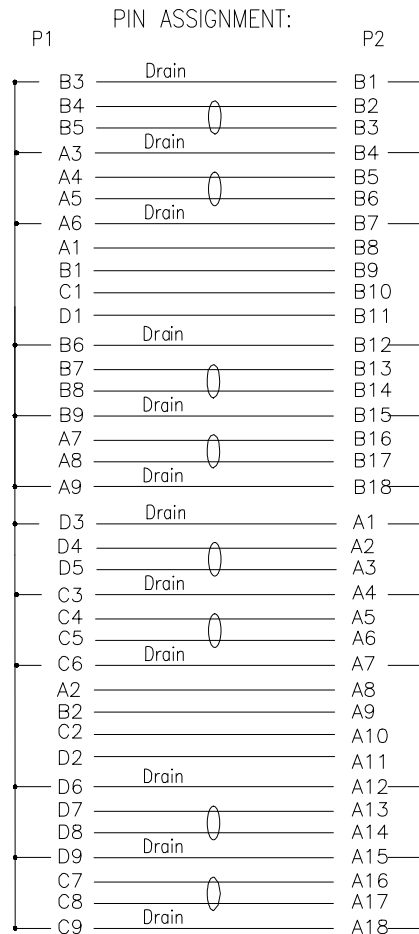

13	LATCH	STAINLESS STEEL	2	pcs
12	MOLDING	LDPE,NATURAL	A/R	9
11	MOLDING	PBT+30GF% BLACK	A/R	9
10	PCBA	MINI SAS 36PIN PCB, PIN:15u Au, 105±10 ohm	2	PCS
9	EXPANDO	PET BALCK OD: 10mm	A/R	mm
8	MOLDING	PA BLACK	A/R	g
7	ACETATE TAPE	W=25±5mm	A/R	mm
6	PCB	MINI SAS HD 4I PCB(A/B),PIN: AU 15u&30u,100±10 ohm	1	PCS
5	PCB	MINI SAS HD 4I PCB(C/D),PIN: AU 15u&30u,100±10 ohm	1	PCS
4	COVER	MINI SAS HD 4I PC BLACK	1	PCS
3	HOUSING	MINI SAS HD 4I PC BLACK	1	PCS
2	CABLE	30AWG CABLE	A/R	mm
1	CABLE	<30AWG*2C+2d>*Al+MYLAR,OD:0.97*2.17MM,100±10 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT



RENHOTECH GROUP

客户料号 Cus'P/N	图号 Drawing No	RHT-726-3006	品名 Name	HD Mini SAS SFF-8643 to SFF-8087 right bend
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision
线性 Linear		比例 Scale	—	图纸确认 APPROVAL
角度Angles		页码 Page	1/1	日期 Date
±3°		Third Angle Projection		绘图 Drawing
				审核 Checked
				客户确认 Customer Approved