




发行版本 Revision	修改内容 Description	制图 Drawing	日期 Date
R1.0	First release	Riky	2024.06.17

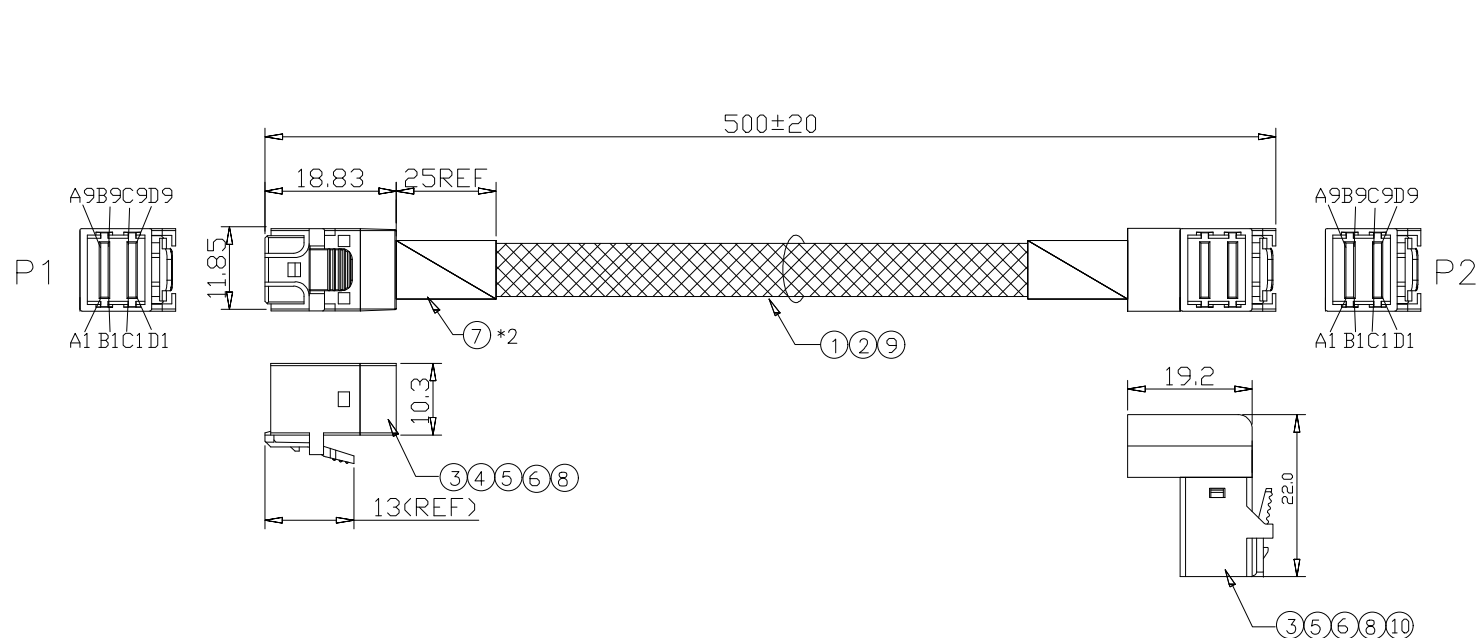


NOTE:

1.100% OPEN&SHORT TESTIGN,

2.INSULATION RESISTANCE 10M Ωhm MIN DC300V

3.CONDUCTIVE RESISTANCE: 2 Ωhm MAX

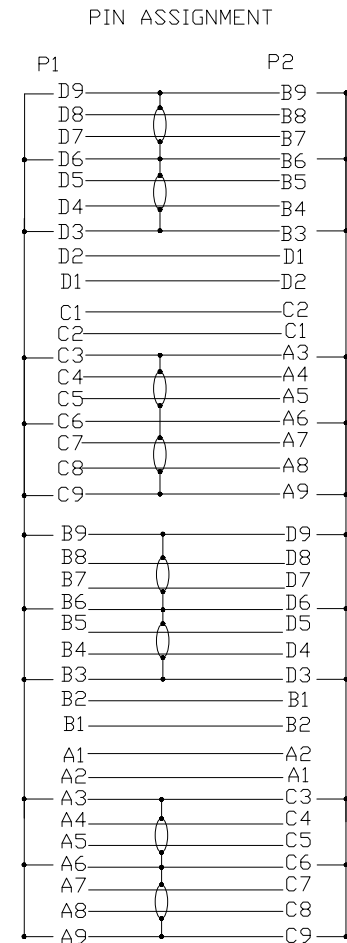

10	COVER	MINI SAS HD 4I RA COVER, PC BLACK	1	PCS
9	EXPAND	PET BALCK DD: 10mm	A/R	mm
8	MOLDING	PA BLACK	A/R	g
7	ACETATE TAPE	W=25±5mm	A/R	mm
6	PCB	MINI SAS HD 4I PCB(A/B),PIN: AU 15u&30u,100±10 ohm	2	PCS
5	PCB	MINI SAS HD 4I PCB(C/D),PIN: AU 15u&30u,100±10 ohm	2	PCS
4	COVER	MINI SAS HD 4I PC BLACK	1	PCS
3	HOUSING	MINI SAS HD 4I PC BLACK	2	PCS
2	CABLE	30AWG CABLE	A/R	mm
1	CABLE	<30AWG*2C+2d>*Al+MYLAR,DD:0.97*2.17MM,100±10 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT



RENHOTECH GROUP

客户料号 Cus'P/N	图号 Drawing No	RHT-726-3014	品名 Name	MiniSAS HD SFF-8643 TO SFF-8643 right angle Cable
未注公差 Unless Otherwise Specified	单位 Unit	mm	版本 Revision	R1.0
线性 Linear	0.5~6 >6~30 >30	±0.2 ±0.3 ±0.5	比例 Scale	—
角度Angles	±3°	页码 Page	1/1	Third Angle Projection
图纸确认 APPROVAL	日期 Date	2024.06.17	2024.06.17	
绘图 Drawing	Riky	2024.06.17	审核 Checked	Jason
客户确认 Customer Approved				