



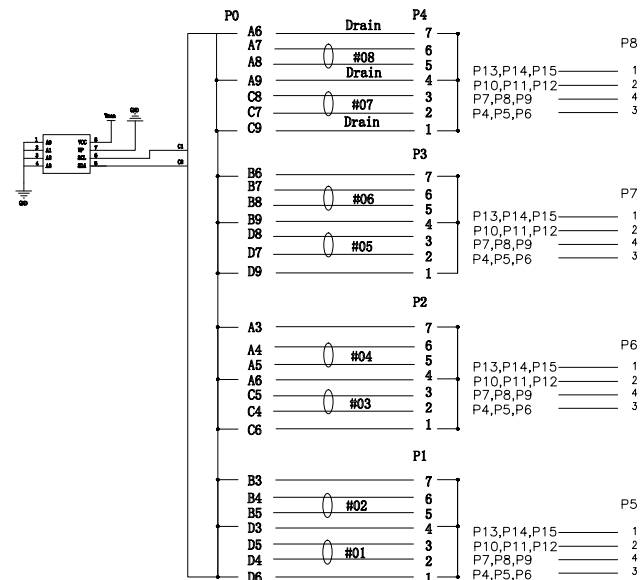

| 发行版本<br>Revision | 修改内容<br>Description | 制图<br>Drawing | 日期<br>Date |
|------------------|---------------------|---------------|------------|
| R1.0             | First release       | Riky          | 2024.06.17 |

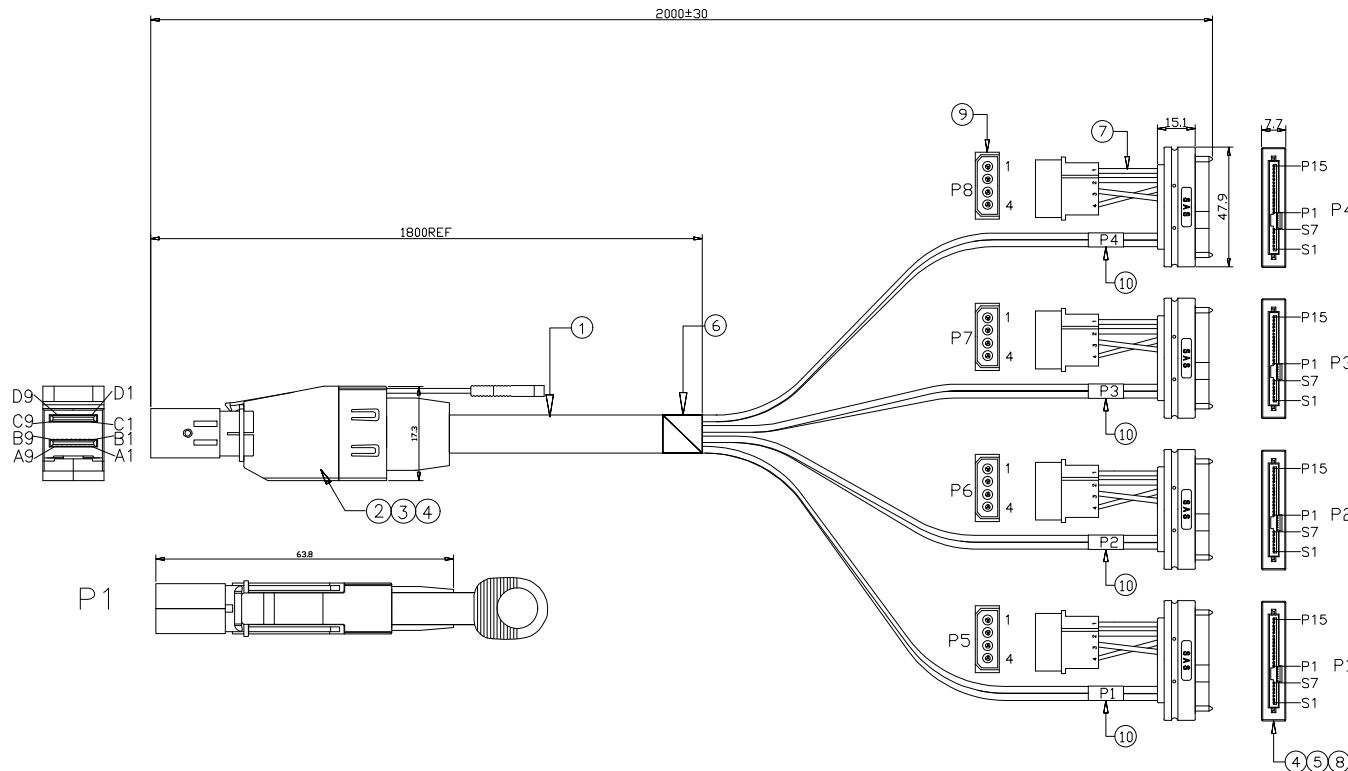

NOTE:  
1.100%OPEN&SHORT TESTIGN,  
2.INSULATION RESISTANCE 10M Ohm MIN DC300V  
3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

|     |                |                                                                    |     |      |
|-----|----------------|--------------------------------------------------------------------|-----|------|
| 10  | LABLE          | W6*L24, PRINT "P1&P2&P3&P4"                                        | 4   | pcs  |
| 9   | CONN.          | 4P,NATURAL,PH5.08,PING/F                                           | 4   | pcs  |
| 8   | CONN.          | SAS 29P/F,PIN/G/F                                                  | 4   | pcs  |
| 7   | CABLE          | 20AWG (RED/BLACK/YELLOW)                                           | A/R | mm   |
| 6   | ACETATE TAPE   | W=25±5mm,BLACK                                                     | 1   | pcs  |
| 5   | MOLDING        | 45P PVC BLACK                                                      | A/R | g    |
| 4   | MOLDING        | LDPE,NATURAL                                                       | A/R | g    |
| 3   | ASSEMBLY PARTS | MINISAS HD ASSEMBLY (Zinc ALLOY HOODS, HOOK,PULL-TAB, RUBBER RING) | 1   | set  |
| 2   | PCB            | MINISAS HD 4X PCB, PIN,15u&30U Au, 100±10 Ohm                      | 1   | pcs  |
| 1   | CABLE          | (28AWG*2C+D+HMAM+HM)*8C+M+AM+B,DD:7.5±0.15MM,BLACK PVC 100±5 Ohm   | A/R | mm   |
| NO. | PART NAME      | SPEC DESCRIPTION                                                   | QTY | UNIT |



RENHOTECH GROUP

|                                    |                                      |              |                |                                                              |
|------------------------------------|--------------------------------------|--------------|----------------|--------------------------------------------------------------|
| 客户料号<br>Cus'P/N                    | 图号<br>Drawing No                     | RHT-726-3018 | 品名<br>Name     | External HD Mini SAS SFF-8644<br>to SAS 4xSFF-8482 29P+POWER |
| 未注公差<br>Unless Otherwise Specified | 单位<br>Unit                           | mm           | 版本<br>Revision | R1.0                                                         |
| 线性<br>Linear                       | 0.5~6 ±0.2<br>>6~30 ±0.3<br>>30 ±0.5 | 比例<br>Scale  | —              | —                                                            |
| 角度Angles                           | ±3°                                  | 页码<br>Page   | 1/1            | —                                                            |
| Third Angle Projection             | —                                    | —            | —              | —                                                            |
| 图纸确认<br>APPROVAL                   | 日期<br>Date                           | —            | —              | —                                                            |
| 绘图<br>Drawing                      | Riky                                 | —            | —              | —                                                            |
| 审核<br>Checked                      | Jason                                | —            | —              | —                                                            |
| 客户确认<br>Customer Approved          | —                                    | —            | —              | —                                                            |