


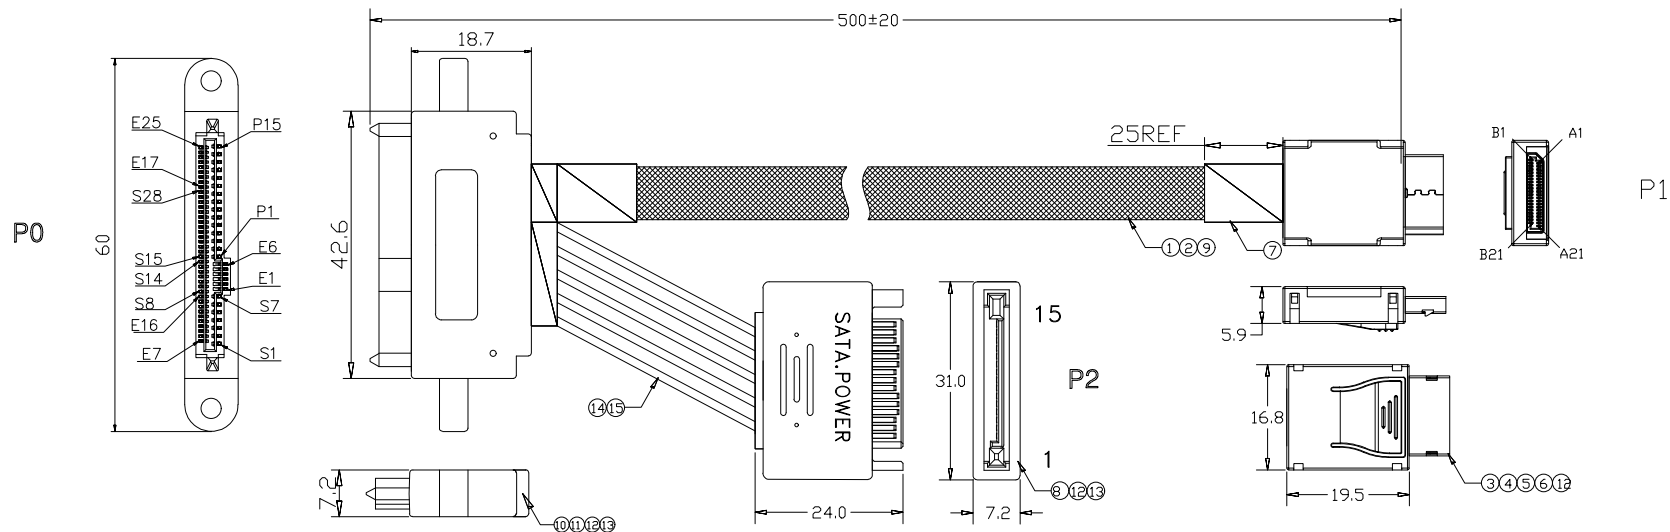

PIN ASSIGNMENT

P1

B21
GND
PCIE_TX3-
PCIE_TX3+
GND
PCIE_TX2-
PCIE_TX2+
GND
SB6A
SB2A
SB8A
SB1A
SB0A
GND
PCIE_TX1-
PCIE_TX1+
GND
PCIE_TX0-
PCIE_TX0+
GND
B1

P0

S28	GND
E18	PCIE_TX3-
E17	PCIE_TX3+
S22	GND
S24	PCIE_TX2-
S23	PCIE_TX2+
S28	GND
P4	
E5	PERST
E22	GND
E24	CALK
E23	CLK
S16	GND
S18	PCIE_TX1-
S17	PCIE_TX1+
E12	GND
E11	PCIE_TX0-
E10	PCIE_TX0+
E12	GND

P1

A21
GND
PCIE_RX3-
PCIE_RX3+
GND
PCIE_RX2-
PCIE_RX2+
GND
SB5A
SB4A
SB9A
SB3A
SB7A
GND
PCIE_RX1-
PCIE_RX1+
GND
PCIE_RX0-
PCIE_RX0+
GND
A1

P0

E19	GND
E20	PCIE_RX3-
E21	PCIE_RX3+
S25	GND
S26	PCIE_RX2-
S27	PCIE_RX2+
E9	GND
E8	CLK-
E7	CLK+
P11	Activityv
S19	GND
S20	PCIE_RX1-
S21	PCIE_RX1+
E15	GND
E13	PCIE_RX0-
E14	PCIE_RX0+
E12	GND

P0	E3	P1	P2	P3	P4	P5	P6	P7	P8	P9			P12	P13	P14	P15
P2	P1P2P3	----				P4P5P6		P7P8P9			P10P11P12		P13P14P15			
SYMBOL	3.3V	----				GND		5V			GND		12V			
WIRE AWG	24AWG	----				20AWG		20AWG			24AWG		20AWG			

NOTE:
1.100%OPEN&SHORT TESTIGN,
2.INSULATION RESISTANCE 10M Ohm MIN DC300V
3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

⑮	CABLE	24AWG (RED/BLACK)	A/R	M
⑭	CABLE	20AWG (RED/BLACK/YELLOW)	A/R	M
⑬	MOLDING	45P PVC BLACK	A/R	KG
⑫	MOLDING	LDPE,NATURAL	A/R	KG
⑪	CONN	SAS 68P/F PINAu 15u BLACK	1	PCS
⑩	PCB	MINISAS 68P PCB, FR4, 88±8 ohm	1	PCS
⑨	EXPANDD	PET BALCK DD: 10mm	A/R	M
⑧	CONN.	15PIN SATA/M G/F BLACK	1	PCS
⑦	ACETATE TAPE	W=25±5mm	A/R	M
⑥	CONN	DCULINK 4I CONN PINAu 15u	1	PCS
⑤	PCB	DCULINK 4I PCB 88±8 ohm	1	PCS
④	HOOK	DCULINK 4I HOOK_UP PC+ABS, BLACK	1	PCS
③	HOOK	DCULINK 4I HOOK_DOWN PC+ABS, BLACK	1	PCS
②	CABLE	30AWG CABLE	A/R	M
①	CABLE	(32AWG±2C±2D)AL+MYLAR,DD:0.65*1.54MM,85±5 ohm.	A/R	M
NO.	NAME	MATERIAL DESCRIPTION	Q'TY	UNIT



RENHOTECH GROUP

客户料号 Cus'P/N			图 号 Drawing No		RHT-726-4003		品 名 Name		OCulink SFF-8611 4i to U.2 SFF8639+15P SATA		
未注公差 Unless Otherwise Specified			单 位 Unit	mm	版 本 Revision	R1.0		图纸确认 APPROVAL			日期 Date
线性 Linear	0.5~6	±0.2	比 例	—		绘 图 Drawing		FSH		2024. 06. 17	
	>6~30	±0.3	页 码	1 / 1		审 核 Checked		Jason		2024. 06. 17	
	>30	±0.5	Page			客户确认 Customer Approved					
角度Angles		±3°									