


发行版本 Revision	修 改 内 容 Description	制 图 Drawing	日 期 Date
R1.0	First release	FSH	2024.06.17

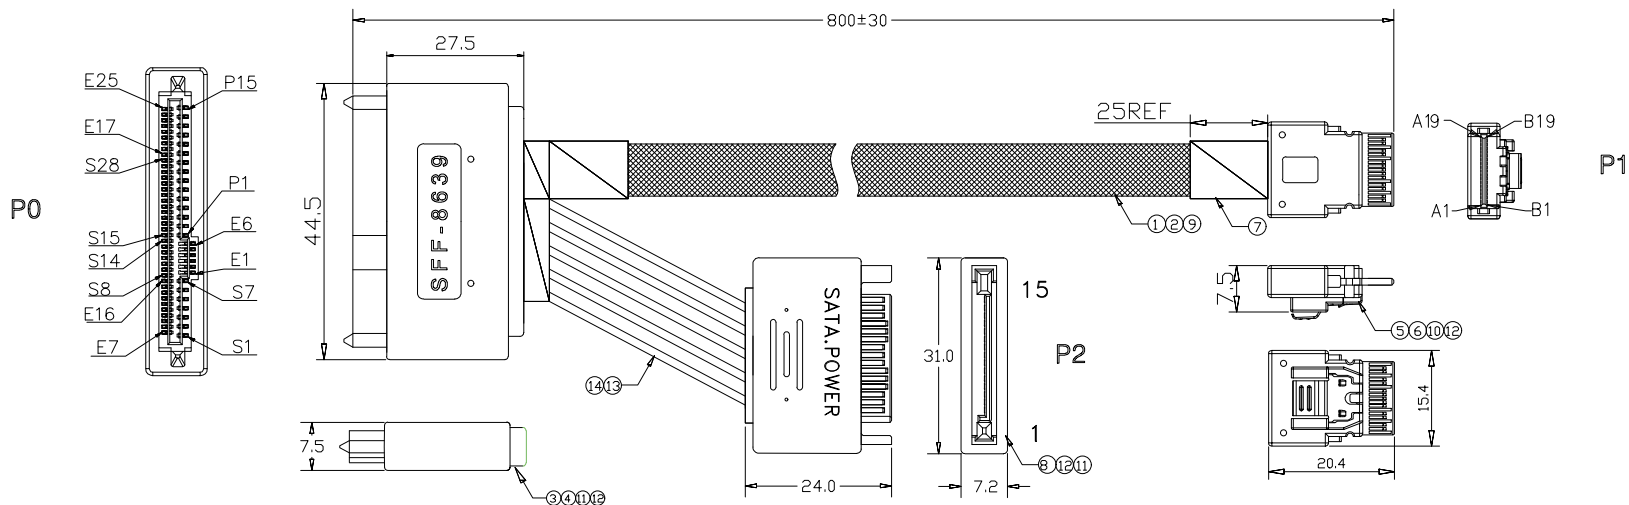

PIN ASSIGNMENT

P1

GND	B19	S28	GND
PCIE_TX3-	B18	E18	PCIE_TX3-
PCIE_TX3+	B17	E17	PCIE_TX3+
GND	B16	S22	GND
PCIE_TX2-	B15	S24	PCIE_TX2-
PCIE_TX2+	B14	S23	PCIE_TX2+
GND	B13	S28	GND
SB6A	B12	P4	
SB2A	B11	E5	PERST
SB8A	B10	E22	GND
SB1A	B9	E24	CALK
SB0A	B8	E23	CLK
GND	B7	S16	GND
PCIE_TX1-	B6	S18	PCIE_TX1-
PCIE_TX1+	B5	S17	PCIE_TX1+
GND	B4	E12	GND
PCIE_TX0-	B3	E11	PCIE_TX0-
PCIE_TX0+	B2	E10	PCIE_TX0+
GND	B1	E12	GND

P0

E19	GND
E20	PCIE_RX3-
E21	PCIE_RX3+
S25	GND
S26	PCIE_RX2-
S27	PCIE_RX2+
E9	GND
E8	CLK-
E7	CLK+
P11	Activitv
S19	GND
S20	PCIE_RX1-
S21	PCIE_RX1+
E15	GND
E13	PCIE_RX0-
E14	PCIE_RX0+
E12	GND


P0	E3	P1	P2	P3	P4	P5	P6	P7	P8	P9			P12	P13	P14	P15
P2	P1P2P3	----			P4P5P6			P7P8P9			P10P11P12		P13P14P15			
SYMBOL	3.3V	----			GND			5V			GND		12V			
WIRE AWG	24AWG	----			20AWG			20AWG			24AWG		20AWG			

NOTE:
1.100%OPEN&SHORT TESTIGN,
2.INSULATION RESISTANCE 10M Ohm MIN DC300V
3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

14	CABLE	24AWG (RED/BLACK)	A/R	M
13	CABLE	20AWG (RED/BLACK/YELLOW)	A/R	M
12	MOLDING	LDPE,NATURAL	A/R	KG
11	MOLDING	45P PVC BLACK	A/R	KG
10	MOLDING	PBT+30GF% BLACK	A/R	KG
9	EXPANDD	PET BALCK DD, 10mm	A/R	M
8	CONN.	15PIN SATA/M G/F BLACK	1	PCS
7	ACETATE TAPE	W=25±5mm	A/R	M
6	LATCH	STAINLESS STEEL	1	PCS
5	PCB	SLIMSAS 4I PCB, PIN15u±30u Au, 88±8 ohm	1	PCS
4	CONN	SAS 68P/F PIN±Au 15u BLACK	1	PCS
3	PCB	MINISAS 68P PCB, FR4, 88±8 ohm	1	PCS
2	CABLE	30AWG CABLE	A/R	M
1	CABLE	(32AWG±2C+2d)±Al+MYLAR,DD0.65±1.52MM,85±5 ohm	A/R	M
NO.	NAME	MATERIAL DESCRIPTION	QTY	UNIT



RENHOTECH GROUP

客户料号 Cus' P/N			图 号 Drawing No		RHT-726-5001		品 名 Name	Slim SAS SFF-8654 4i to U.2 SFF-8639 15P+Power SATA			
未注公差 Unless Otherwise Specified				单 位 Unit	mm	版 本 Revision	R1.0		图纸确认 APPROVAL		日期 Date
线性 Linear	0.5~6 ±0.2		比 例 Scale	—		绘 图 Drawing		FSH		2024. 06. 17	
	>6~30 ±0.3		页 码 Page	1 / 1		审 核 Checked		Jason		2024. 06. 17	
	>30 ±0.5					客户确认 Customer Approved					
角度Angles			±3°								