




发行版本 Revision
R1.0

修改内容 Description
First release

制图 Drawing
Riky

日期 Date
2025.09.10

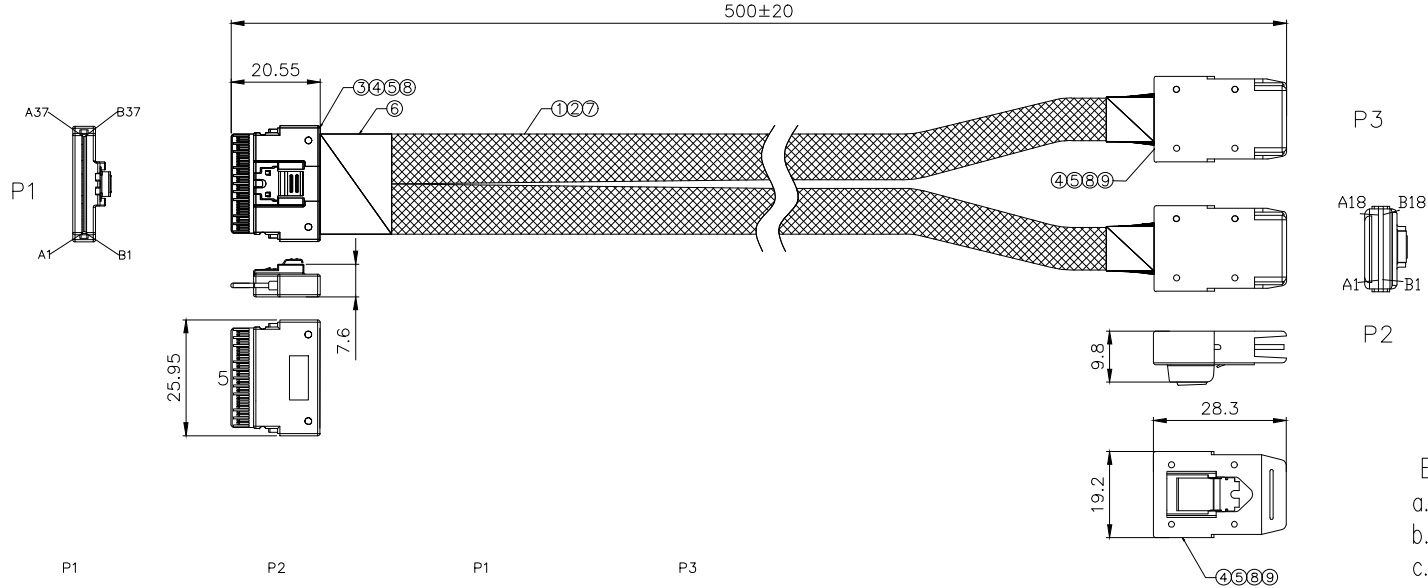

ELECTRICAL CHARACTER:
a. 100% OPEN&SHORT TESTING;
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
c. INSULATION RESISTANCE:10M Ohm(Min);
d. CONDUCTIVE RESISTANCE:2 Ohm(Max).

P1	P2
B19 GND	A18 GND
B18 TX3-	A17 RX3-
B17 TX3+	A16 RX3+
B16 GND	A15 GND
B15 TX2-	A14 RX2-
B14 TX2+	A13 RX2+
B13 GND	A12 GND
B12 SIDEBAND	A11 SIDEBAND
B11 SIDEBAND	A10 SIDEBAND
B10	
B9 SIDEBAND	A9 SIDEBAND
B8 SIDEBAND	A8 SIDEBAND
B7 GND	A7 GND
B6 TX1-	A6 RX1-
B5 TX1+	A5 RX1+
B4 GND	A4 GND
B3 TX0-	A3 RX0-
B2 TX0+	A2 RX0+
B1 GND	A1 GND
A19 GND	B18 GND
A18 RX3-	B17 TX3-
A17 RX3+	B16 TX3+
A16 GND	B15 GND
A15 RX2-	B14 TX2-
A14 RX2+	B13 TX2+
A13 GND	B12 GND
A12 SIDEBAND	B11 SIDEBAND
A11 SIDEBAND	B10 SIDEBAND
A10	
A9 SIDEBAND	B9 SIDEBAND
A8 SIDEBAND	B8 SIDEBAND
A7 GND	B7 GND
A6 RX1-	B6 TX1-
A5 RX1+	B5 TX1+
A4 GND	B4 GND
A3 RX0-	B3 TX0-
A2 RX0+	B2 TX0+
A1 GND	B1 GND

P1	P3
B37 GND	A18 GND
B36 TX7-	A17 RX3-
B35 TX7+	A16 RX3+
B34 GND	A15 GND
B33 TX6-	A14 RX2-
B32 TX6+	A13 RX2+
B31 GND	A12 GND
B30 SIDEBAND	A11 SIDEBAND
B29 SIDEBAND	A10 SIDEBAND
B28	
B27 SIDEBAND	A9 SIDEBAND
B26 SIDEBAND	A8 SIDEBAND
B25 GND	A7 GND
B24 TX5-	A6 RX1-
B23 TX5+	A5 RX1+
B22 GND	A4 GND
B21 TX4-	A3 RX0-
B20 TX4+	A2 RX0+
B19 GND	A1 GND
A37 GND	B18 GND
A36 RX7-	B17 TX3-
A35 RX7+	B16 TX3+
A34 GND	B15 GND
A33 RX6-	B14 TX2-
A32 RX6+	B13 TX2+
A31 GND	B12 GND
A30 SIDEBAND	B11 SIDEBAND
A29 SIDEBAND	B10 SIDEBAND
A28	
A27 SIDEBAND	B9 SIDEBAND
A26 SIDEBAND	B8 SIDEBAND
A25 GND	B7 GND
A24 RX5-	B6 TX1-
A23 RX5+	B5 TX1+
A22 GND	B4 GND
A21 RX4-	B3 TX0-
A20 RX4+	B2 TX0+
A19 GND	B1 GND

9	PCB	MINISAS 36PIN PCB,PIN:Au 15u, 100±10 ohm	2	PCS
8	LATCH	STAINLESS STEEL	3	pcs
7	EXPANDD	PET BALCK DD: 10mm	A/R	mm
6	ACETATE TAPE	W=25±5mm,BLACK	A/R	mm
5	MOLDING	LDPE,NATURAL	A/R	g
4	MOLDING	PBT+30GF% BLACK	A/R	g
3	PCBA	SLIMSAS 8I PCB, PIN:15u&30u Au, 88±8 ohm	1	PCS
2	CABLE	30AWG CABLE,DD:0.65	A/R	mm
1	CABEL	(32AWG*2C+2D)AL+MYLAR,DD:0.65*1.54MM,85±5 ohm	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT



RENHOTEC GROUP

客户料号 Cus'P/N	料号 P/N	RHT-726-1004	品名 Name	Slim SAS SFF-8654 8i to Mini SAS 36P 2SFF-8087
未注公差 Unless Otherwise Specified		单位 Unit	mm	版本 Revision
线性 Linear	0.5~6 ±0.2 >6~30 ±0.3 >30 ±2%	比例 Scale	--	R1.0
角度Angles	±3°	页码 Page	Third Angle Projection	
图纸确认 DRAWING		Riky		日期 Date
审核 Checked		Jason		2025.09.10
客户确认 Customer Approved				